

WAAS
CH **86207**
W06A

APP CRS
060°

Rwy Idg
TDZE
Apt Elev

8496
677
682

RNAV (GPS) RWY 6

DECATUR (DEC)

RNP APCH - GPS.

▼

▲


For inoperative MALS, increase LPV all Cats visibility to RVR 5000 and LNAV Cat D visibility to RVR 6000. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. Baro-VNAV and VDP NA when using Logan County altimeter setting. When local altimeter setting not received, use Logan County altimeter setting and increase all DA/MDA 80 feet, increase all Cats LPV and LNAV/VNAV visibility ¼ mile. Increase LNAV Cat C and Circling Cats C/D visibility ¼ mile. For inoperative MALS when using Logan County altimeter setting increase LPV visibility to 1¼ mile. Circling to Rwy 12 NA at night.

MALS

MISSED APPROACH:

Climb to 2800 direct ZOLIP and hold.

ATIS 126.35	CHAMPAIGN APP CON* 132.85 290.225	DECATUR TOWER* 118.9(CTAF) 291.775	GND CON 121.75 291.775	UNICOM 122.95
-----------------------	---	--	----------------------------------	-------------------------

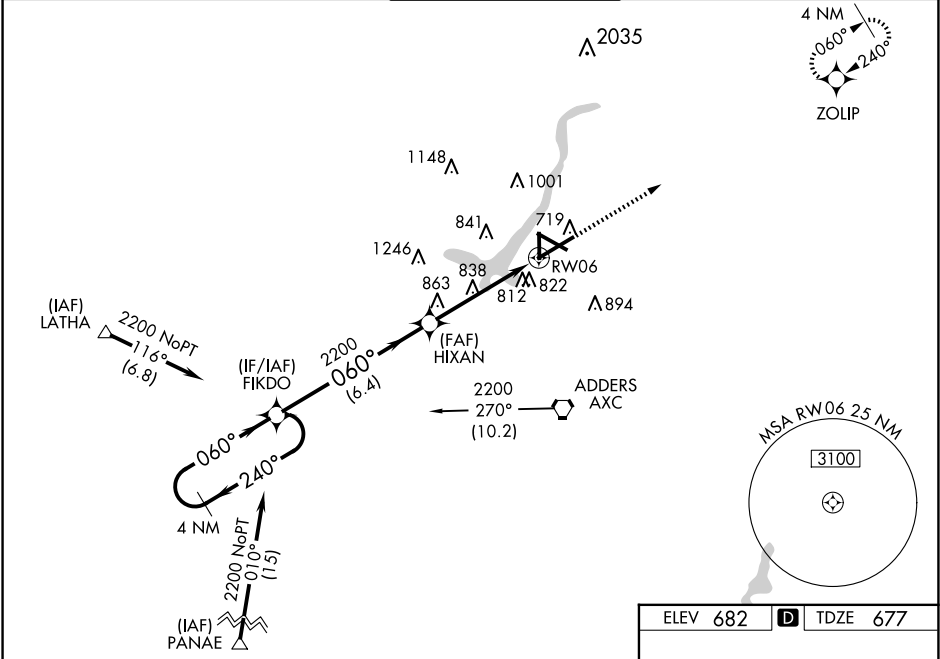

4 NM Holding Pattern

FIKDO

HIXAN

2200

2800

ZOLIP

2200 ← 240°

060° →

060°

GP 3.00°

TCH 57

2200

1.2 NM to RWY 06

6.4 NM

3.4 NM

1.2

CATEGORY	A	B	C	D
LPV DA	951/24 274 (300-½)			
LNAV/VNAV DA	1101/50 424 (500-1)			
LNAV MDA	1100/24 423 (500-½)	1100/40 423 (500-¾)		1100/50 423 (500-1)
CIRCLING	1200-1 518 (600-1)	1240-1 558 (600-1)	1360-2 678 (700-2)	1360-2¼ 678 (700-2¼)

ELEV 682

TDZE 677

81

150

6799 X 150

752

5298 X 150

36

060°

8496 X 150

12

30

HIRL Rwy 6-24

MIRL Rws 12-30 and 18-36