
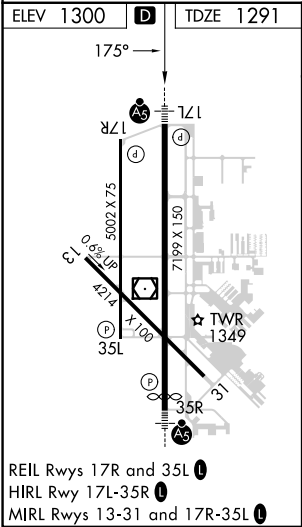


WAAS CH 72737 W17A	APP CRS 175°	Rwy Idg TDZE 1291 Apt Elev 1300
--	------------------------	---

RNAV (GPS) RWY 17L

WILEY POST (PWA)

RNP APCH-GPS.		MALSR	MISSED APPROACH: Climb to 1700 then climbing right turn to 3400 direct BISKT and hold.	
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cat C/D visibility to 1 SM.	ASR			
ATIS 128.725	OKE CITY APP CON 124.6 266.8	WILEY POST TOWER ★ 126.9 (CTAF) 0 306.9	GND CON 121.7	UNICOM 122.95

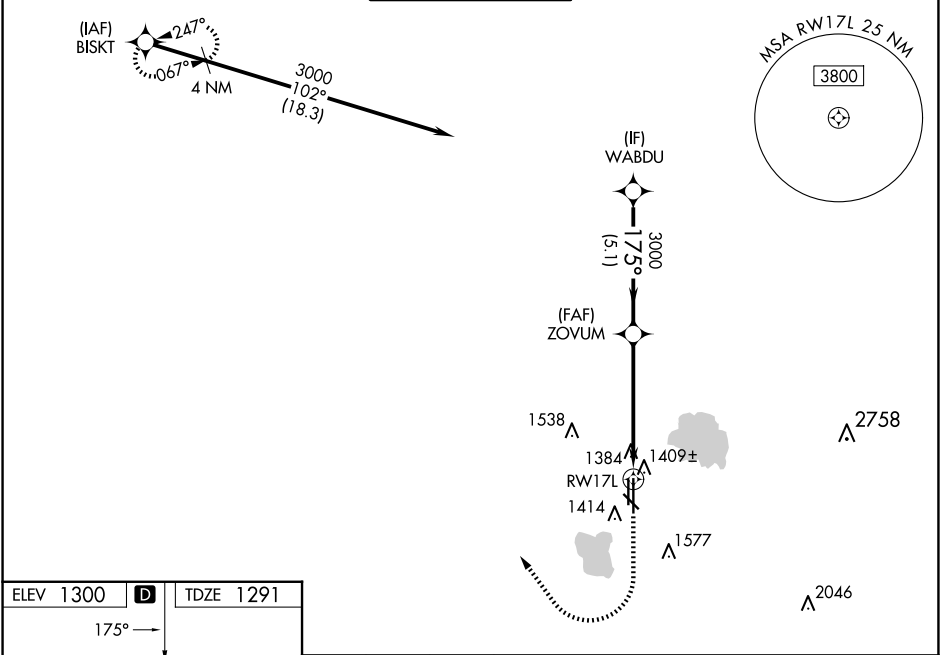

1700 3400 BISKT		ZOVUM 3000 175° 3000 GP 3.00° TCH 54		
1 NM to RW17L 1 NM 4.2 NM 5.1 NM				
CATEGORY	A	B	C	D
LPV DA	1491-1/2		200 (200-1/2)	
LNAV/VNAV DA	1590-1/2		299 (300-1/2)	
LNAV MDA	1660-1/2 369 (400-1/2)		1660-5/8 369 (400-5/8)	
CIRCLING	1780-1 480 (500-1)		1880-1 1/2 580 (600-1 1/2) 1880-2 580 (600-2)	