

APP CRS	Rwy Idg	9501
274°	TDZE	1027
	Apt Elev	1027

RNAV (RNP) Z RWY 27

KANSAS CITY INTL (MCI)

RADAR required for procedure entry. RNP AR APCH - GPS.


▼

For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 5500 and RNP 0.30 all Cats visibility to 1 3⁄8 SM.

MALSR

MISSED APPROACH: Climb to 4000 on track 274° to WOOKIE and on track 325° to BOWLR and hold.

D-ATIS	KANSAS CITY APP CON	INTERNATIONAL TOWER	GND CON	CLNC DEL	CPDLC
128.375	120.95 318.1	128.2 254.25	121.8	135.7	

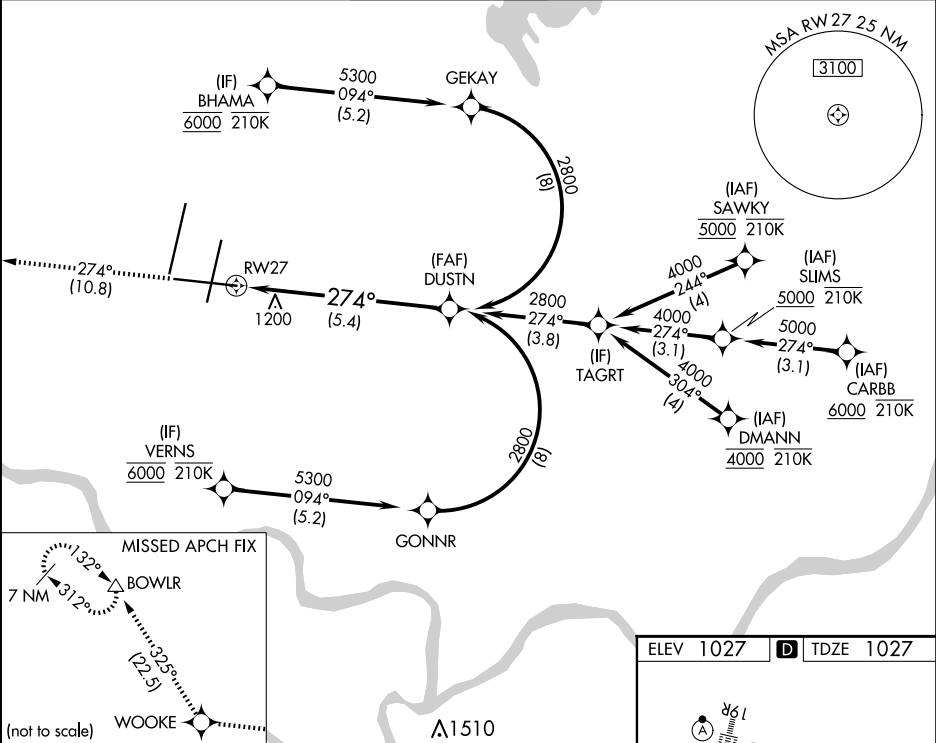

4000	WOOKIE	tr 274°	tr 325°	BOWLR
VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 72).				
RW27				
See planview for multiple IF locations.				
5.4 NM				
CATEGORY	A	B	C	D
RNP 0.15 DA	1371/30 344 (400-%)			
RNP 0.30 DA	1506/50 479 (500-1)			

AUTHORIZATION REQUIRED

