
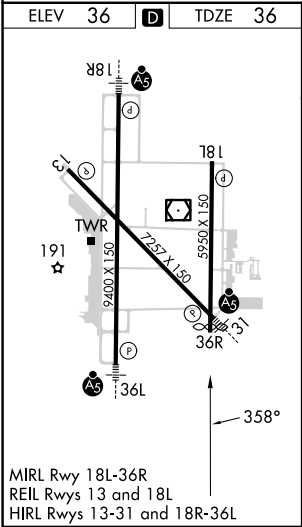


WAAS CH 72830 W36A	APP CRS 358°	Rwy Idg TDZE Apt Elev	5759 36 36
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 36R

VALLEY INTL (HRL)

RNP APCH - GPS.				MISSED APPROACH: Climb to 2000 direct BETVE and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. Baro-VNAV and VDP NA when using Port Isabel altimeter setting. When local altimeter setting not received, use Port Isabel altimeter setting: increase LPV DA to 278 feet; increase LNAV/VNAV DA to 328 feet and all visibilities 1⁄8 SM, increase all MDAs 60 feet and LNAV visibility Cat C and D 1⁄8 SM, and Circling visibility Cats C and D 1⁄4 SM.				
ATIS 124.85	VALLEY APP CON 120.7 279.5	HARLINGEN TOWER ★ 119.3 (CTAF) 317.6	GND CON 121.7	UNICOM 122.95

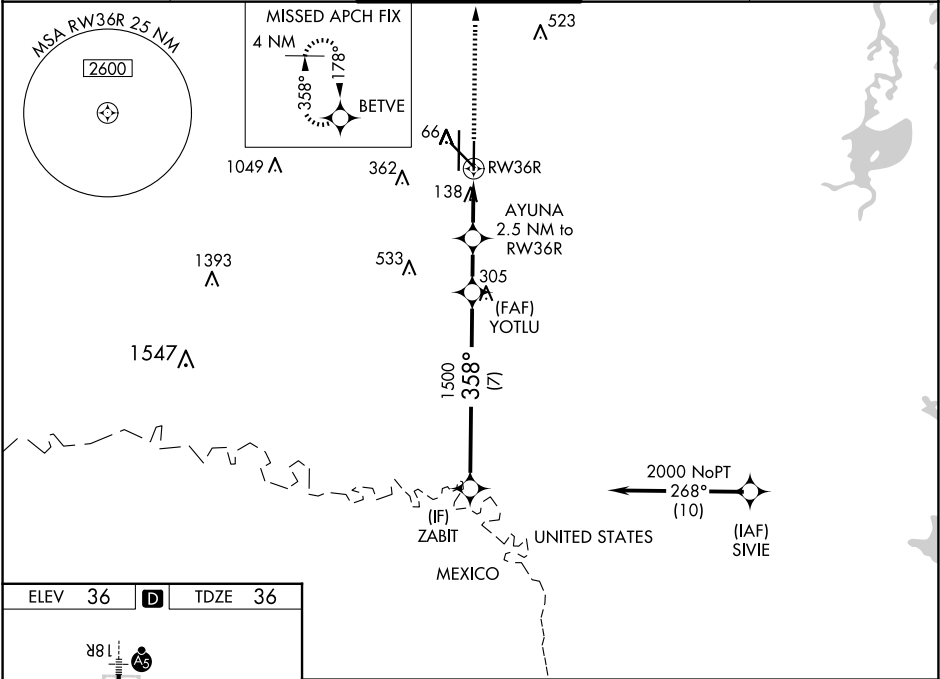

2000 BETVE		AYUNA 2.5 NM to RW36R		YOTLU 1500	ZABIT 2000
1 NM to RW36R		1 NM to RW36R		880 1500	
1 NM		1.5 NM		2 NM	
CATEGORY		A		B	
LPV DA		236- $\frac{3}{4}$		200 (200- $\frac{3}{4}$)	
LNAV/VNAV DA		286- $\frac{3}{4}$		250 (300- $\frac{3}{4}$)	
LNAV MDA		400-1		364 (400-1)	
CIRCLING		460-1 424 (500-1)		560-1 524 (600-1)	
		600-1 $\frac{1}{2}$ 564 (600-1 $\frac{1}{2}$)		680-2 644 (700-2)	