

LOC/DME I-TYN

110.9

Chan 46

APP CRS

036°

Rwy Idg

8000

TDZE

40

Apt Elev

42

ILS or LOC RWY 4R

LAFAYETTE RGNL/PAUL FOURNET FLD (LFT)


DME required for procedure entry and for LOC only.

⚠

Rwy 4R helicopter visibility reduction below 3/4 SM NA. VDP NA when using Acadiana Rgnl altimeter setting. When local altimeter setting not received, use Acadiana Rgnl altimeter setting and increase all DA 29 feet and all MDA 40 feet, use S-ILS 4R and S-LOC 4R visibility all Cats 1/8 SM, Circling visibility Cat C/D 1/4 SM.

MISSED APPROACH: Climb to 2000 on LFT R-035 to BEDDY INT/LFT 18.9 DME and hold.

ATIS 134.05	LAFAYETTE APP CON * 121.1 363.0	LAFAYETTE TOWER * 118.5 (CTAF) 0 257.8	GND CON 121.8	CLNC DEL 125.55	UNICOM 122.95
----------------	------------------------------------	---	------------------	--------------------	------------------

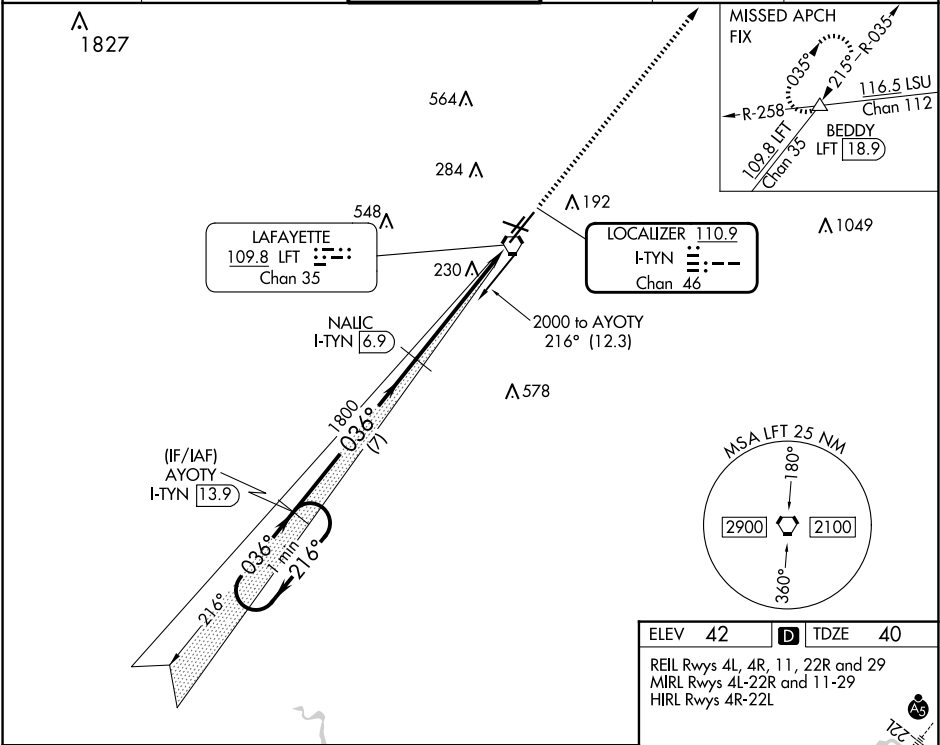

One Minute Holding Pattern

AYOTY I-TYN 13.9

2000 ← 216°

036° →

GS 3.00° TCH 49

NAJIC I-TYN 6.9

1800

* I-TYN 2.8

I-TYN 1.6

7 NM

4.1 NM

1.3 NM

2000

BEDDY

LFT R-035

* LOC only.

CATEGORY	A	B	C	D
S-ILS 4R	316-7/8 276 (300-7/8)			
S-LOC 4R	500-1 460 (500-1)		500-13/8 460 (500-13/8)	
CIRCLING	540-1 498 (500-1)	580-1 538 (600-1)	700-13/4 658 (700-13/4)	700-2 658 (700-2)

ELEV 42

TDZE 40

REIL Rwy 4L, 4R, 11, 22R and 29

MIRL Rwy 4L-22R and 11-29

HIRL Rwy 4R-22L