

WAAS CH 93836 W12A	APP CRS 127°	Rwy Idg TDZE Apt Elev 7506 4457 4457
--	------------------------	--


RNAV (GPS) RWY 12

LAS CRUCES INTL (LRU)


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12 °C (11 °F) or above 49°C (120°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Deming altimeter setting. When local altimeter setting not received, use Deming altimeter setting: increase LPV DA to 4821 feet and LNAV/VNAV DA to 4824 feet and all visibilities ½ mile; increase all MDA 120 feet and visibility Cat C and D ½ mile.

MISSED APPROACH: Climb to 5800 then climbing right turn to 8100 direct IPATE and hold.

AWOS-3 119,025	ALBUQUERQUE CENTER 128.2 285.5	UNICOM 122.7 (CTAF) 0
--------------------------	--	---------------------------------

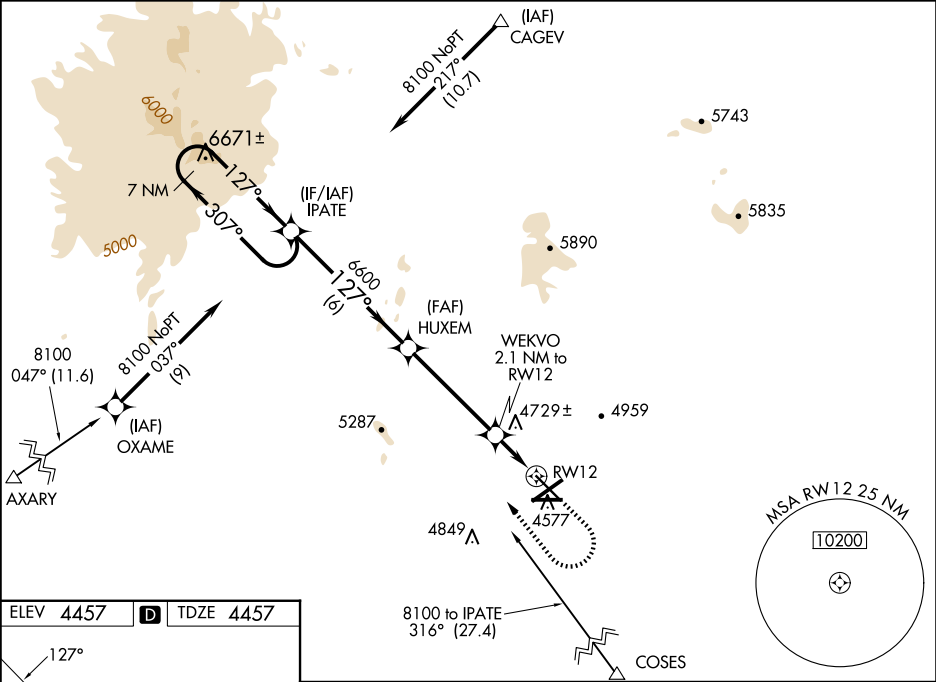

ELEV 4457	D	TDZE 4457
-----------	----------	-----------



REIL Rwy 12
HIRL Rwy 12-30 **0**
MIRL Rwy 4-22 and 8-26 **0**

7 NM Holding Pattern				IPATE	HUXEM	WEEKVO 2.1 NM to RW12	5800 ↑	8100 ↷	IPATE ✦
8100 ← 307° 127° →				127°	6600	*1.2 NM to RW12 ↓ RW12	*LNAV only.		
GP 3.00° TCH 55				6600	*5180	0.9	1.2 NM		
CATEGORY				A	B	C	D		
LPV DA		4707-¾		250 (300-¾)					
LNAV/VNAV DA		4710-¾		253 (300-¾)					
LNAV MDA		4900-1	443 (500-1)	4900-1⅓		443 (500-1⅓)			
CIRCLING		4900-1 443 (500-1)	5040-1 583 (600-1)	5320-2½ 863 (900-2½)		5320-2¾ 863 (900-2¾)			