

WAAS CH 99417 W17A	APP CRS 173°	Rwy Idg TDZE 1553 Apt Elev 1563
--	------------------------	---

RNAV (GPS) RWY 17



HOBART RGNL (HBR)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 45°C (113°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Altus/Quartz Mountain Rgnl altimeter setting and increase all DA 71 feet and all MDA 80 feet, increase LPV and LNAV/VNAV all Cats, LNAV Cats C and D and Circling Cat C visibility ¼ mile. Baro-VNAV NA when using Altus/Quartz Mountain altimeter setting. VDP NA with Altus/Quartz Mountain altimeter setting.

MISSED APPROACH: Climb to 4000 direct DOMLE and hold.

ASOS 133.325	ALTUS APP CON ★ 125.1 353.7	UNICOM 122.8 (CTAF)
------------------------	---------------------------------------	-------------------------------

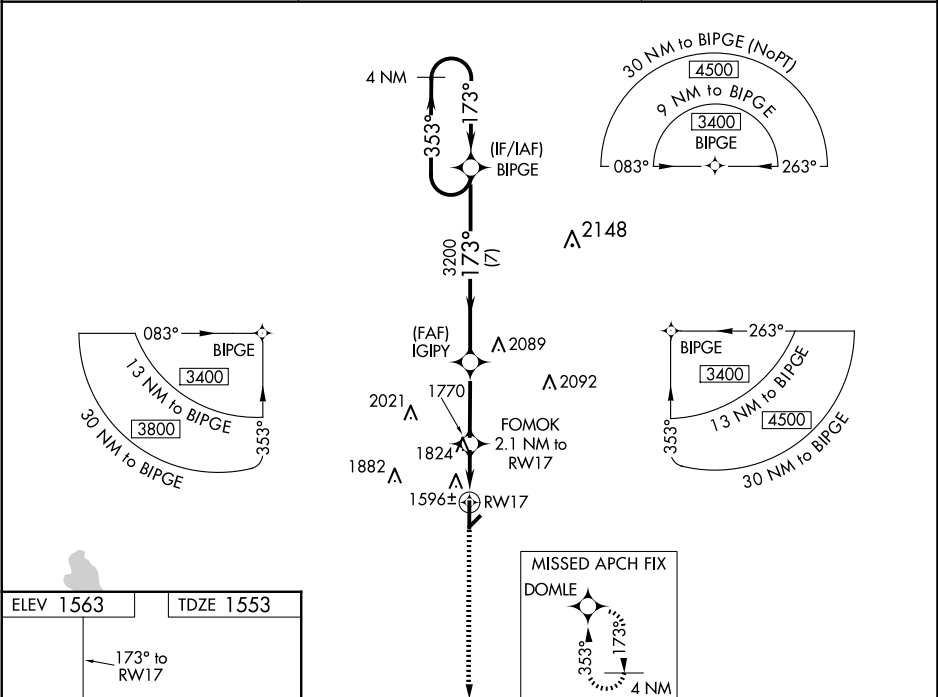

4000

↑

DOMLE

✱

4 NM Holding Pattern

FOMOK
2.1 NM to RW17

IGIPY
3200

BIPGE

353° →

← 173°

3400

*LNAV only.

RW17

1.6 NM to RW17

2240*

3200

GP 3.00°

TCH 35°

1.6

0.5

2.9 NM

7 NM

CATEGORY	A		B		C		D	
LPV DA			1803-1		250 (300-1)			
LNAV/VNAV DA			1900-1¼		347 (400-1¼)			
LNAV MDA	2080-1		527 (600-1)		2080-1½ 527 (600-1½)		2080-1¾ 527 (600-1¾)	
CIRCLING	2080-1		517 (600-1)		2320-2¼ 757 (800-2¼)		2460-3 897 (900-3)	