

LOC I-FOD <u>109.1</u>	APP CRS 063°	Rwy Idg TDZE Apt Elev	6547 1107 1156
----------------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 6
FORT DODGE RGNL (FOD)

ADF required. RADAR required for procedure entry at SHRLA.


MALSR

T
A NA DME from FOD DME. Simultaneous reception of I-FOD and FOD DME required. For inop ALS, increase S-LOC 6 Cat C/D visibility to 1³/₈ SM.



MISSED APPROACH: Climb to 2800 then left turn direct BARRO LOM and hold.

AWOS-3PT 118.775	MINNEAPOLIS CENTER 134.0 288.3	UNICOM 123.0 (CTAF) 0
----------------------------	--	---------------------------------

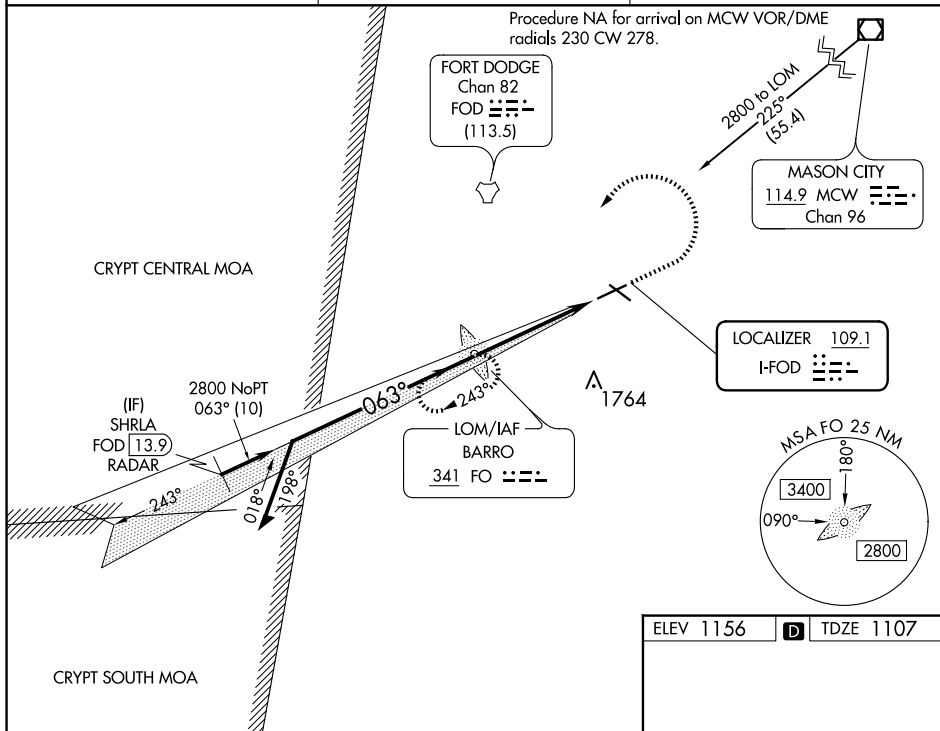

CATEGORY	A	B	C	D
S-ILS 6	1307-½ 200 (200-½)			
S-LOC 6	1600-½ 493 (500-½)		1600-1 493 (500-1)	
 CIRCLING	1600-1 444 (500-1)	1620-1 464 (500-1)	1740-1½ 584 (600-1½)	2080-3 924 (1000-3)

ELEV 1156

D

TDZE 1107

063°

6547 X 150

1.2% UP

6301 X 100

0.6% UP

1254

MIRL Rwy 12-30

REIL Rwy 12, 24 and 30

HIRL Rwy 6-24

FAF to MAP 4.9 NM

	Knots	60	90	120	150	180
Min:Sec	4:54	3:16	2:27	1:58	1:38	