

WAAS CH 61015 W06A	APP CRS 063°	Rwy Idg TDZE Apt Elev	6547 1107 1156
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 6
FORT DODGE RGNL (FOD)


RNP APCH.

⚠ Baro-VNAV NA when using Webster City altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. VDP NA when using Webster City altimeter setting. When local altimeter setting not received, use Webster City altimeter setting: increase LPV DA to 1349 feet; increase LNAV/VNAV DA to 1567 feet and all Cats visibility ¼ SM; increase all MDAs 60 feet and LNAV Cats C/D and Circling Cat C visibility ¼ SM. For inoperative MALSR when using Webster City altimeter setting, increase LPV all Cats visibility to 1 mile.

MALSR

⚠ MISSED APPROACH:
Climb to 3000 direct
OXDAH and hold.

AWOS-3PT 118.775	MINNEAPOLIS CENTER 134.0 288.3	UNICOM 123.0 (CTAF) Ⓛ
----------------------------	--	---------------------------------

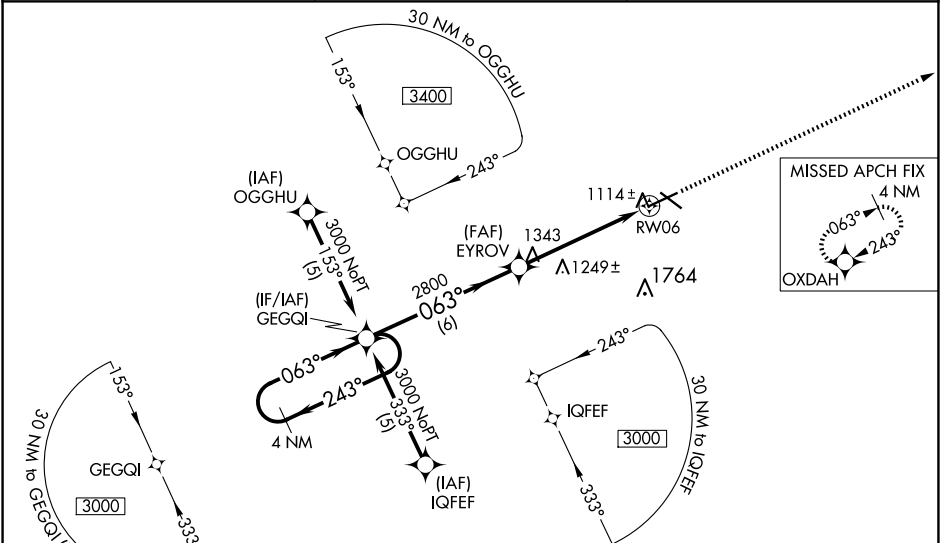

ELEV 1156 **D** TDZE 1107

3000 OXDAH

4 NM Holding Pattern

GP 3.00° TCH 54

6 NM 4 NM 1.2 NM

CATEGORY	A	B	C	D
LPV DA	1307-½		200 (200-½)	
LNAV/VNAV DA	1525-1		418 (400-1)	
LNAV MDA	1500-½ 393 (400-½)		1500-1 393 (400-1)	
CIRCLING	1560-1 404 (500-1)	1620-1 464 (500-1)	1740-1½ 584 (600-1½)	2080-3 924 (1000-3)

063° to RW06

MIRL Rwy 12-30 Ⓛ
HIRL Rwy 6-24 Ⓛ
REIL Rwy 12, 24 and 30 Ⓛ

NC-3, 15 MAY 2025 to 12 JUN 2025

NC-3, 15 MAY 2025 to 12 JUN 2025