

WAAS CH 50517 W18A	APP CRS 184°	Rwy Idg TDZE Apt Elev	4498 22 24
--	------------------------	-----------------------------	---------------------------------------


RNAV (GPS) RWY 18

ARANSAS COUNTY (RKP)

Baro-VNAV NA when using Ingleside altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Ingleside altimeter setting and increase all DA 33 feet and all MDA 40 feet; increase LNAV/VNAV visibility all Cats ¼ mile. VDP NA with Ingleside altimeter setting.

MISSED APPROACH: Climb to 2000 direct YAYUR and on track 108° to PITYI and hold, continue climb-in-hold to 2000.

ASOS 119.275	CORPUS APP CON 120.9 348.725	CLNC DEL 121.7	UNICOM 123.05 (CTAF) 0
------------------------	--	--------------------------	----------------------------------

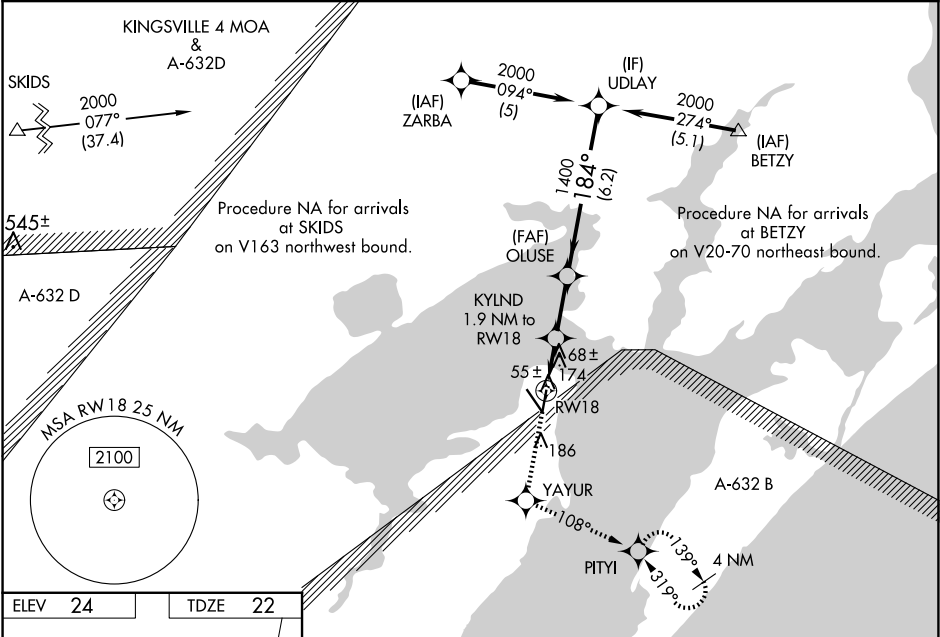

ELEV 24

TDZE 22

184° to RW18

REIL Rwy 14 0

MIRL Rws 14-32 and 18-36 0

2000	YAYUR	tr 108°	PITYI	UDLAY	Procedure Turn NA
*LNAV only	KYLND 1.9 NM to RW18	*1.2 NM to RW18	*660	OLUSE 1400	2000
RW18					
GP 3.00° TCH 39°					
CATEGORY	A		B		C
LPV DA	272-1		250 (300-1)		NA
LNAV/VNAV DA	459-1½		437 (500-1½)		NA
LNAV MDA	440-1	418 (500-1)	440-1¼ 418 (500-1¼)		NA
CIRCLING	500-1	476 (500-1)	500-1½ 476 (500-1½)		NA

SC-3, 15 MAY 2025 to 12 JUN 2025

SC-3, 15 MAY 2025 to 12 JUN 2025