

WAAS
CH **86215**
W07B

APP CRS
074°

Rwy Idg **10600**
TDZE **128**
Apt Elev **151**

RNAV (GPS) RWY 7L

TED STEVENS ANCHORAGE INTL (ANC) (PANC)

RNP APCH.

▼

▲

⚡

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats and LNAV Cat C/D visibility to 1½ SM.

MALSR

MISSED APPROACH: Climb to 800 then climbing right turn to 3000 direct JUKEP and hold.


D-ATIS
135.5

ANCHORAGE APP CON
118.6 290.5

ANCHORAGE TOWER
118.3 257.8

GND CON
121.9 338.25

CLNC DEL
119.4 323.1

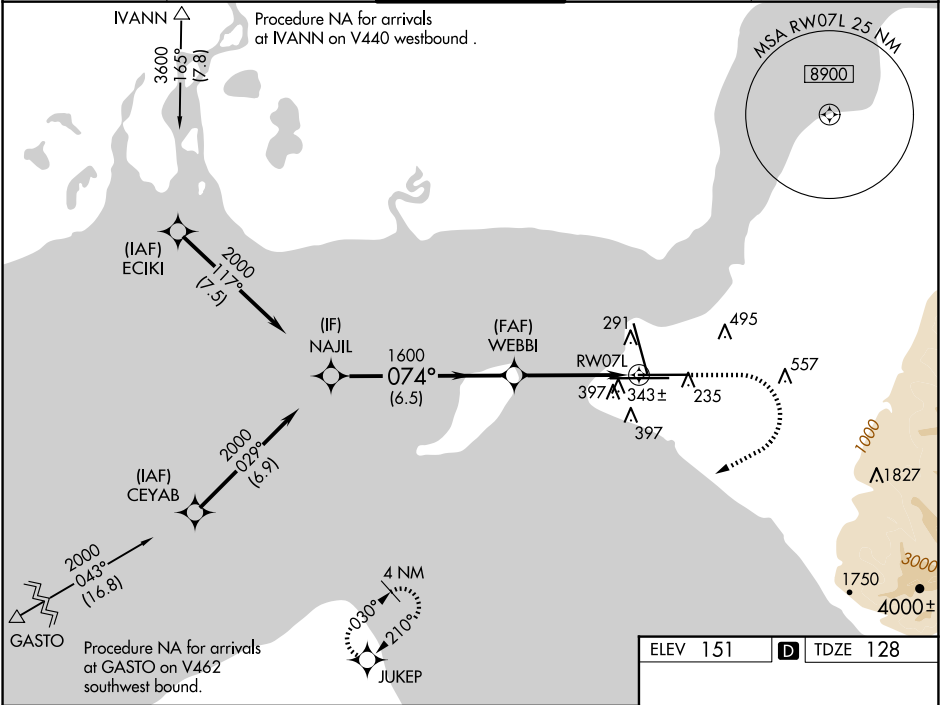

NAJIL

2000

074°

1600

1600

GP 3.00°
TCH 54

6.5 NM

3.2 NM

1.3 NM

800

3000

JUKEP

* 1.3 NM to RW07L

* LNAV only

RW07L

CATEGORY	A	B	C	D
LPV DA	328/18		200 (200-½)	
LNAV/VNAV DA	595/50		467 (500-1)	
LNAV MDA	600/24 472 (500-½)		600/50 472 (500-1)	
CIRCLING	700-1 549 (600-1)		800-1¾ 920-2½ 649 (700-1¾) 769 (800-2½)	

ELEV 151

TDZE 128

074°

1085 X 200

1085 X 150

12400 X 200

0.4% UP

0.5% DOWN

0.5% DOWN

TWR 277

243

REIL Rwy 33
TDZ/CL Rwsy 7L and 7R
HIRL all Rwsy