

WAAS
CH **82501**
W17A

APP CRS
168°

Rwy Idg
TDZE **24**
Apt Elev **24**

RNAV (GPS) RWY 17

ACADIANA RGNL (ARA)

RNP APCH.

▼

Circling NA to Rwy 17W and 35W. Inop table does not apply to LPV.
For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM and LNAV Cats C/D visibility to 1 SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C.


ODALS

↻

⋮

MISSED APPROACH:
Climb to 480 then climbing left turn to 2000 direct CLYNT and hold.

ASOS	LAFAYETTE APP CON *	ACADIANA TOWER *	GND CON	CLNC DEL	CLNC DEL	UNICOM	
133.325	121.1 268.7	125.0 (CTAF) 239.3	121.7	121.7	118.05 (when twr closed)	122.95	122.7 0

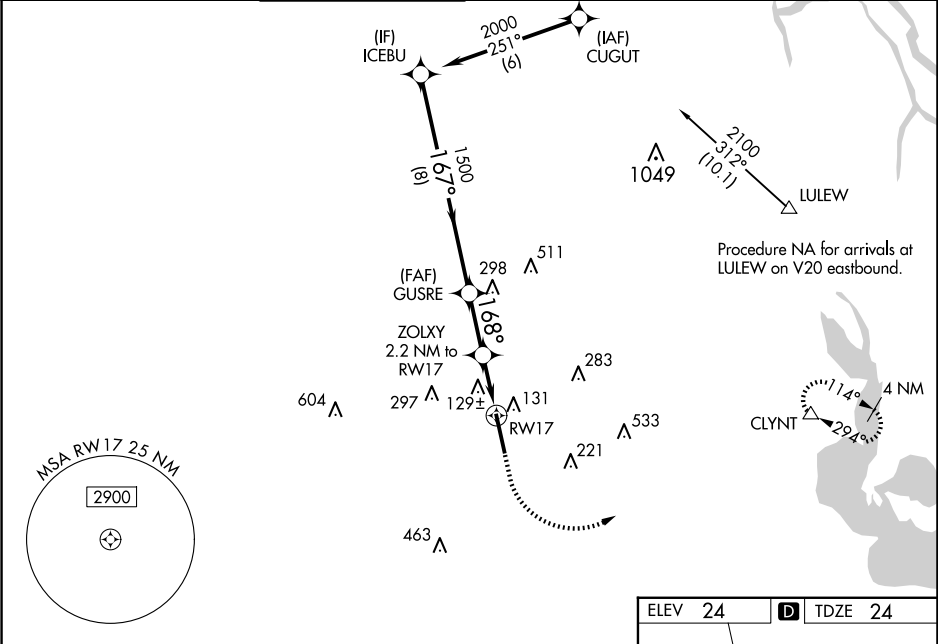

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 51).

480

2000

CLYNT

GP 3.00°

TCH 51

ICEBU

GUSRE

ZOLXY

RW17

2000

1500

760

8 NM

2.3 NM

1.2 NM

1 NM

*LNAV only.

CATEGORY	A	B	C	D
LPV DA		274-¾	250 (300-¾)	
LNAV/VNAV DA		420-1½	396 (400-1½)	
LNAV MDA	380-¾	356 (400-¾)	380-⅞	356 (400-⅞)
CIRCLING	440-1 416 (500-1)	480-1 456 (500-1)	600-1½ 576 (600-1½)	680-2 656 (700-2)

ELEV 24

TDZE 24

168°

168°

35W

35

103

105

800 X 200

500 X 150

35W

35

HIRL Rwy 17-35 0

Seaway Rwy 17W-35W 0