

WAAS CH 99303 W20A	APP CRS 201°	Rwy Idg 8000 TDZE 871 Apt Elev 871
--	------------------------	---

APP CRS
2010

Rwy Idg	8000
TDZE	871
Apt Elev	871

RNAV (GPS) RWY 20

CENTRAL IL RGNL/BLOOMINGTON-NORMAL (BMI)

RNP APCH - GPS.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. Baro-VNAV and VDP NA when using PIA altimeter setting. When local altimeter setting not received, use PIA altimeter setting: increase LPV DA to 1187 feet and all visibilities to RVR 2400; increase LNAV/VNAV DA to 1417 feet and all visibilities to RVR 6000; increase all MDAs 120 feet and LNAV visibility Cat C and D to RVR 5500 and Circling visibility Cat C and D $\frac{1}{4}$ SM. For inop ALS, increase LNAV Cat C and D visibility to RVR 6000. For inop ALS when using PIA altimeter setting, increase LPV all Cats visibility to RVR 4500.

ALSF-2



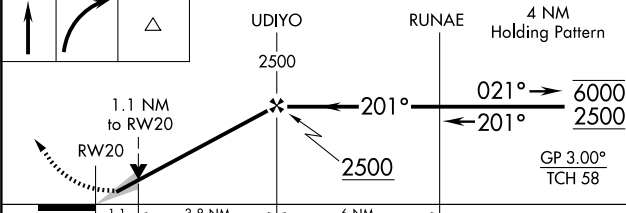

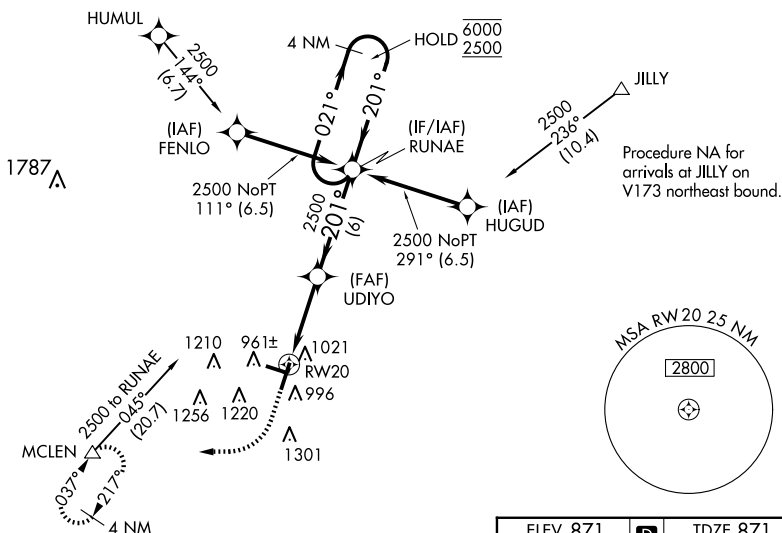
MISSED APPROACH:
Climb to 1500 then
climbing right turn to
3000 direct MCLEN
and hold.

ATIS
119,575

SAINT LOUIS APP CON
128.725 256.9

BLOOMINGTON TOWER ★
124.6 (CTAF) **L** 269.575

GND CON
121,65

UNICOM
122.95

CATEGORY		A	B	C	D
LPV	DA	1071/18 200 (200-½)			
LNNAV/ VNAV	DA	1301/40 430 (500-¾)			
LNNAV	MDA	1280/24 409 (500-½)	1280/40 409 (500-¾)		
 CIRCLING		1340-1 469 (500-1)	1620-2¼ 749 (800-2¼)	1620-2½ 749 (800-2½)	

