
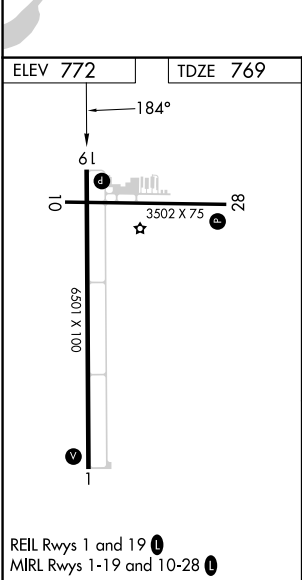


WAAS CH 82405 W19A	APP CRS 184°	Rwy Idg TDZE Apt Elev	6501 769 772
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 19
FREMONT MUNI (F'FX)

T A Baro-VNAV NA when using Muskegon altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). Rwy 19 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Muskegon altimeter setting and increase all DA 65 feet, and all visibilities ¼ mile. Increase all MDA 80 feet, and Cat C/D visibilities ¼ mile. VDP NA when using Muskegon altimeter setting.	MISSED APPROACH: Climb to 2900 direct SACOL and hold.
---	--

AWOS-3 118.775	GREAT LAKES APP CON ★ 119.8 290.35	CLNC DEL 118.25	UNICOM 123.0 (CTAF) 0
--------------------------	--	---------------------------	--

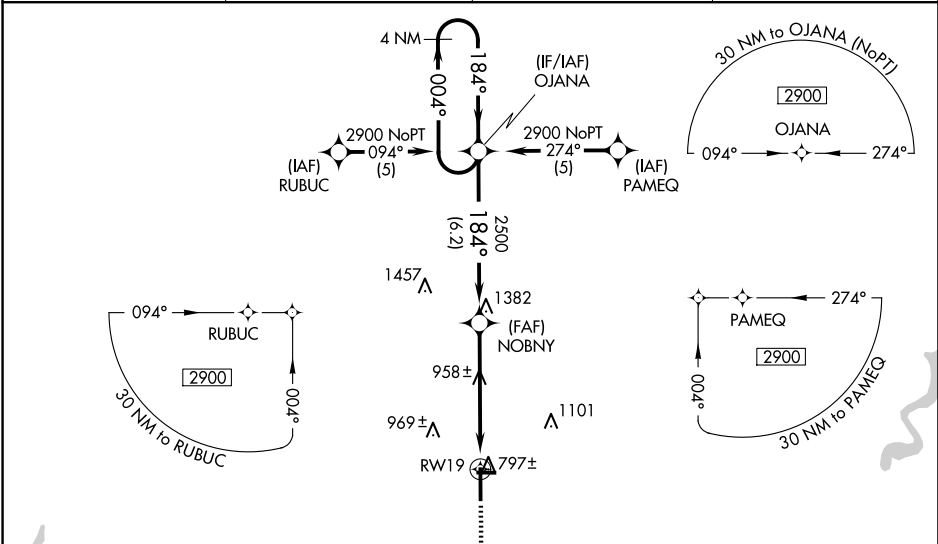

MISSED APCH FIX SACOL			
2900 SACOL VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 27).			
*LNAV only. *1.3 NM to RW19			
NOBNY 2500 184° 2500			
OJANA Holding Pattern 004° 2900 184° GP 3.00° TCH 40			
1.3 3.9 NM 6.2 NM			
CATEGORY	A	B	C D
LPV DA	1074-1 305 (400-1)		
LNAV/VNAV DA	1295-2 526 (600-2)		
LNAV MDA	1220-1 451 (500-1)	1220-1¼ 451 (500-1¼)	1220-1½ 451 (500-1½)
CIRCLING	1260-1 488 (500-1)	1460-2 688 (700-2)	1460-2¼ 688 (700-2¼)

EC-1, 15 MAY 2025 to 12 JUN 2025

EC-1, 15 MAY 2025 to 12 JUN 2025