


LOC I-VKE	APP CRS	Rwy Idg	6400
108.7	311°	TDZE	1450
		Apt Elev	1469


ILS or LOC RWY 31
DEVILS LAKE RGNL (DVL)

RNP APCH - GPS.		MALSR 	MISSED APPROACH: Climb to 3400 direct KRAMR and hold.
DME or RADAR required.			
NA	VDP NA when using Cando altimeter setting. When local altimeter setting not received, use Cando altimeter setting and increase S-ILS 31 DA to 1711 feet; increase all MDAs 80 feet and S-LOC 31 visibility Cat C/D ½ SM, and Circling visibility Cat C/D ¼ SM. DME from DVL DME. DME use requires simultaneous reception of I-VKE and DVL DME. For inop ALS when using Cando altimeter setting, increase S-ILS 31 all Cats visibility to ¾ SM. For inop ALS, increase S-LOC 31 Cat C/D visibility to 1 ¾ SM.		

AWOS-3PT 125.875	MINNEAPOLIS CENTER 124.2 270.3	UNICOM 122.8 (CTAF) 0
---------------------	-----------------------------------	--------------------------

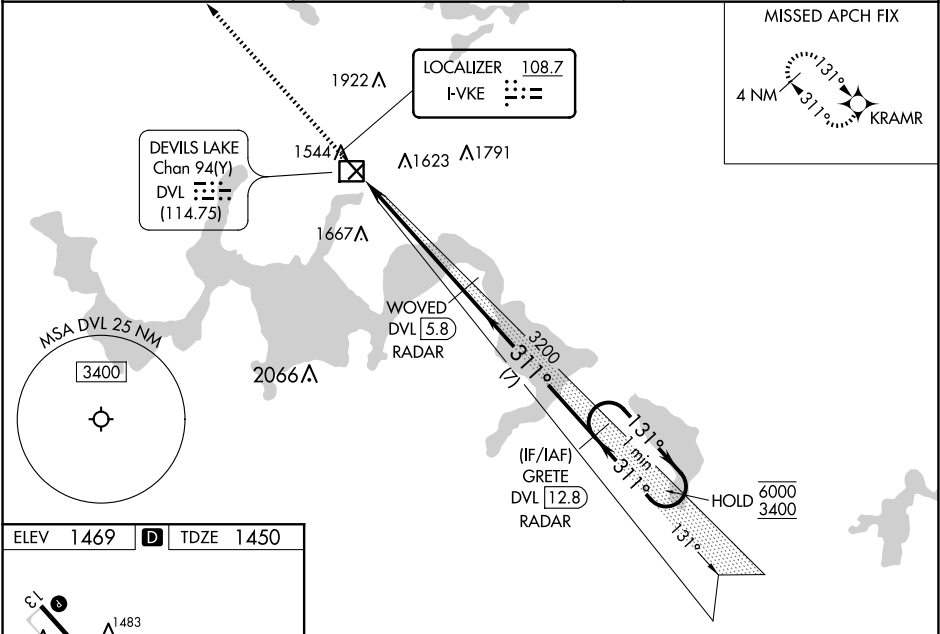

ELEV 1469	D	TDZE 1450
-----------	---	-----------



HIRL Rwy 13-31	REIL Rwy 3, 13 and 21	MIRL Rwy 3-21
FAF to MAP 5.4 NM		
Knots	60	90 120 150 180
Min:Sec	5:24	3:36 2:42 2:10 1:48

3400 KRAMR	WOVED DVL 5.8 RADAR	GRETE DVL 12.8 RADAR	One Minute Holding Pattern
DVL 0.5	DVL 1.8	3200	131° 6000 3400
1.4 NM	4 NM	7 NM	GS 3.00° TCH 44
CATEGORY	A	B	C D
S-ILS 31	1650-½ 200 (200-½)		
S-LOC 31	1920-½ 470 (500-½)		1920-1 470 (500-1)
CIRCLING	2000-1 531 (600-1)		2240-2¼ 771 (800-2¼) 2240-2½ 771 (800-2½)