

LOC/DME I-EEE  
**110.7**  
Chan **44**

APP CRS  
**014°**

Rwy Idg  
TDZE **956**  
Apt Elev **956**

ILS or LOC RWY 1

AMES MUNI (AMW)

DME required.

NA


-27°C

For inop ALS increase S-LOC 1 Cat C/D visibility to 1½ SM.

MALSR

MISSED APPROACH: Climb to 1700 then climbing left turn to 4000 on heading 240° and TNU VOR/DME R-296 to HANSD INT/37.8 DME and hold, continue climb-in-hold to 4000.

|                        |                                           |                          |                                 |
|------------------------|-------------------------------------------|--------------------------|---------------------------------|
| ASOS<br><b>132.025</b> | DES MOINES APP CON<br><b>123.9 307.15</b> | CLNC DEL<br><b>126.0</b> | UNICOM<br><b>122.7 (CTAF) 0</b> |
|------------------------|-------------------------------------------|--------------------------|---------------------------------|

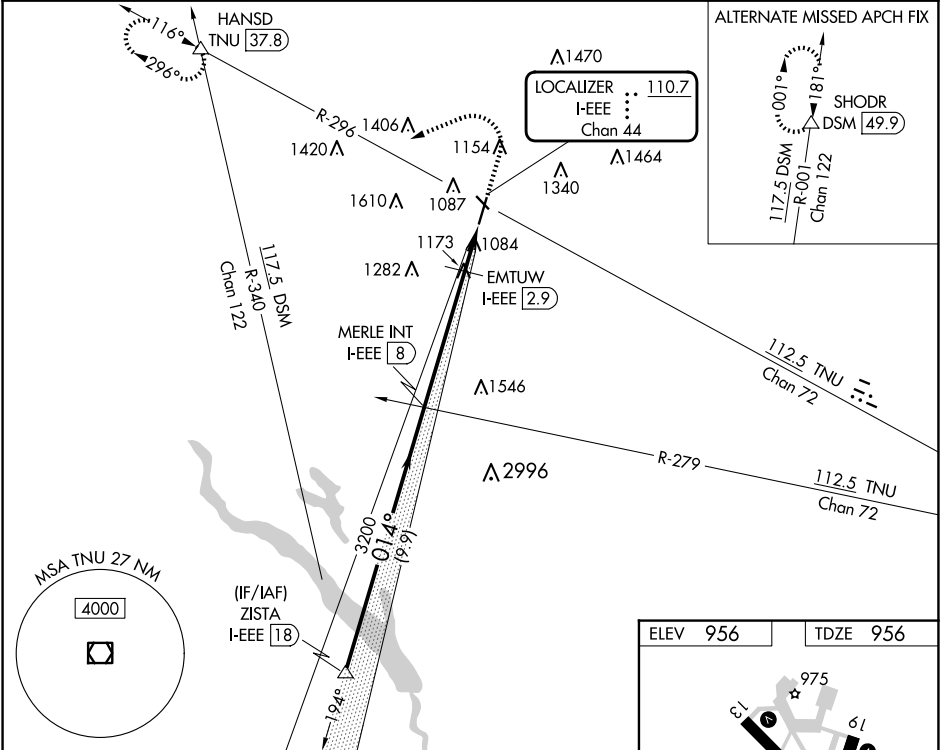

|                 |                |                       |                   |                       |                 |                       |                 |                         |
|-----------------|----------------|-----------------------|-------------------|-----------------------|-----------------|-----------------------|-----------------|-------------------------|
| CATEGORY        | ZISTA I-EEE 18 |                       | MERLE INT I-EEE 8 |                       | EMTUW I-EEE 2.9 |                       | HANSD I-EEE 1.1 |                         |
|                 | 4000           |                       | 3200              |                       | 1580            |                       | 1700            |                         |
| GS 3.00° TCH 50 |                | 9.9 NM                |                   | 5.1 NM                |                 | 1.8 NM                |                 |                         |
| CATEGORY        |                | A                     | B                 | C                     | D               |                       |                 |                         |
| S-ILS 1         |                | 1206-½                |                   | 250 (300-½)           |                 |                       |                 |                         |
| S-LOC 1         |                | 1440-½                |                   | 484 (500-½)           |                 | 1440-1                |                 | 484 (500-1)             |
| CIRCLING        |                | 1440-1<br>484 (500-1) |                   | 1460-1<br>504 (600-1) |                 | 1640-2<br>684 (700-2) |                 | 1960-3<br>1004 (1100-3) |

