

WAAS CH 93824 W04A	APP CRS 043°	Rwy Idg 6000 TDZE 253 Apt Elev 257
--	------------------------	---

RNAV (GPS) RWY 4
DOUGLAS MUNI (DQH)

RNP APCH.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS increase LNAV/VNAV all Cats visibility to 3/4 SM and LNAV Cat C and D visibility to 1 SM.


MALSR




MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 direct OLHUP and hold.

AWOS-3
119.075

JACKSONVILLE CENTER
127.575 269.025

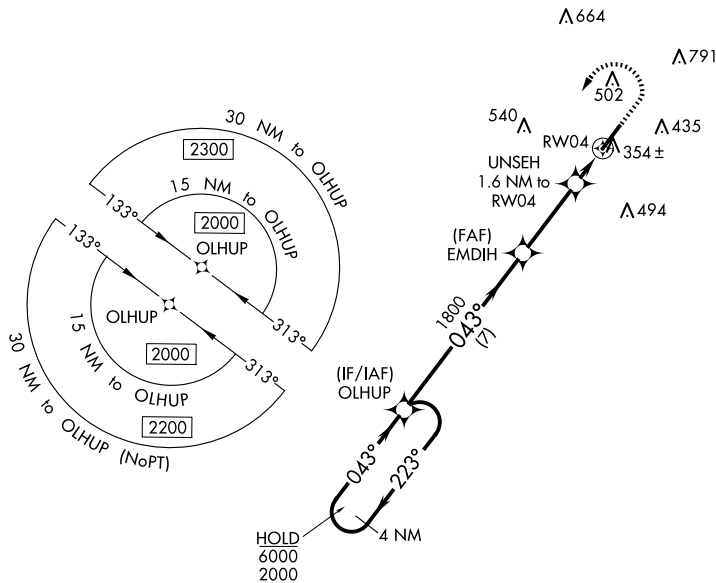UNICOM
122.8 (CTAF) **L**

1182

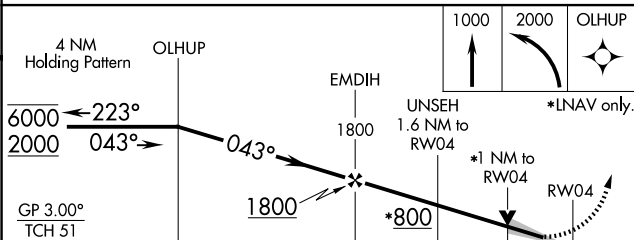

CATEGORY	A	B	C	D
LPV DA		453-½	200 (200-½)	
LNAV/ VNAV DA		538-½	285 (300-½)	
LNAV MDA	620-½	367 (400-½)	620-⅝	367 (400-⅝)
C CIRCLING	720-1 463 (500-1)	820-1 563 (600-1)	960-2 703 (800-2)	1160-3 903 (1000-3)

