



APP CRS	Rwy Idg	8605
168°	TDZE	27
	Apt Elev	27

RNAV (RNP) Z RWY 17L

SACRAMENTO INTL (SMF)

RNP AR APCH-GPS.		MALSR 	MISSED APPROACH: Climb to 500 then right turn to 3000 direct GRIME and hold. *Missed approach requires minimum climb of 290 feet per NM to 3000. #Missed approach requires minimum climb of 300 feet per NM to 3000.			
▼ For uncompensated Baro-VNAV systems, procedure NA below -2°C or above 54°C. For inop ALS, increase RNP 0.12 all Cats visibility to RVR 4000; increase RNP 0.30 all Cats visibility to RVR 4500.						
D-ATIS	NORCAL APP CON		CAPITOL TOWER	GND CON	CLNC DEL	CPDLC
126.75	125.4 259.1 (W-NE) 125.25 257.9 (SW) 127.4 317.5 (E-SE)		125.7 256.7	121.7 256.7	121.1 256.7	

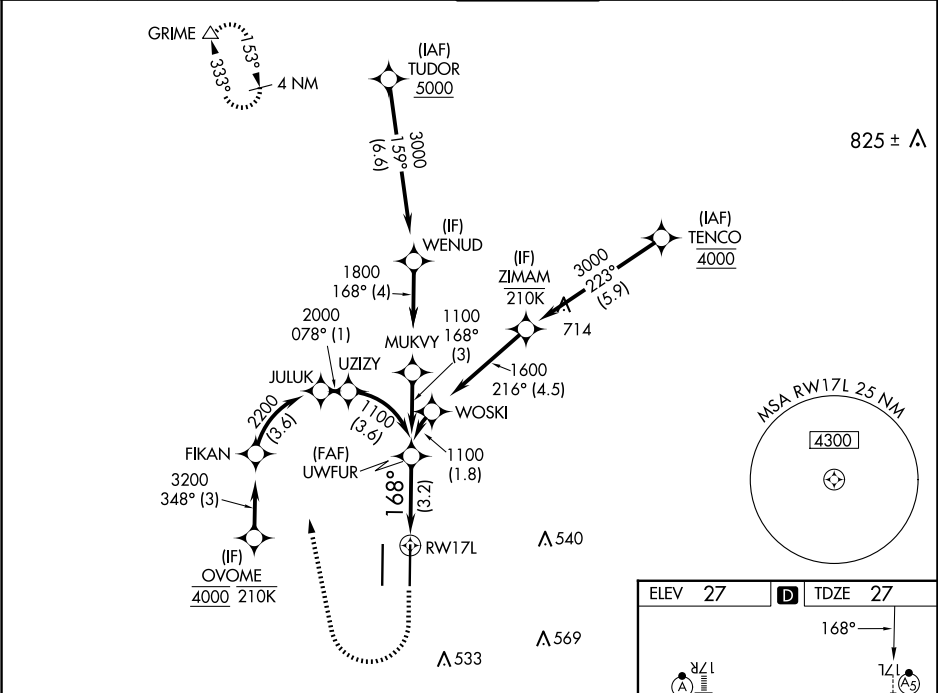

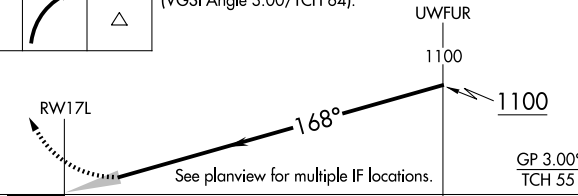500 ↑	3000 	GRIME 	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 64).			
			UWFUR 1100 1100 GP 3.00° TCH 55			
CATEGORY	A	B	C	D		
RNP 0.12 DA#	277/24 250 (300-½)					
RNP 0.30 DA*	339/24 312 (400-½)					
AUTHORIZATION REQUIRED						

