

CRESTON, IOWA

AL-5531 (FAA)

20310


WAAS CH 62822 W16A	APP CRS 161°	Rwy Idg 4901 TDZE 1296 Apt Elev 1300
--	------------------------	---

RNAV (GPS) RWY 16
CRESTON MUNI (CSQ)


V Baro-VNAV NA when using Des Moines altimeter setting. For uncompensated **A** DME/VNAV systems, VNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). BME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. Circling NA to Rwy 4-22. Circling NA for Cats B and C west of Rwy 16-34. When local altimeter setting not received, use Des Moines altimeter setting and increase all DA 150 feet and all MDA 160 feet; increase LPV all Cats visibility ¾ mile, VNAV/VNAV all Cats visibility ½ mile, VNAV and Circling Cat A/B visibility ¼ mile, and VNAV and Circling Cat C visibility ½ mile.

MISSED APPROACH.
Climb to 3000 direct
FOVOB and hold.

AWOS-3 124.75	MINNEAPOLIS CENTER 125.65 306.95	UNICOM 122.8 (CTAF) 0
-------------------------	--	---------------------------------

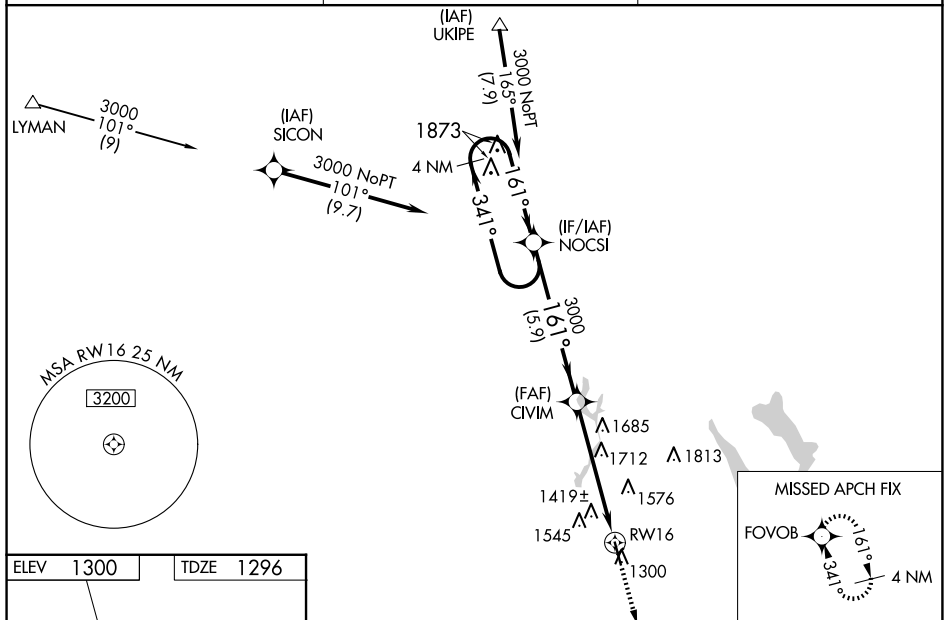

ELEV 1300	TDZE 1296
-----------	-----------

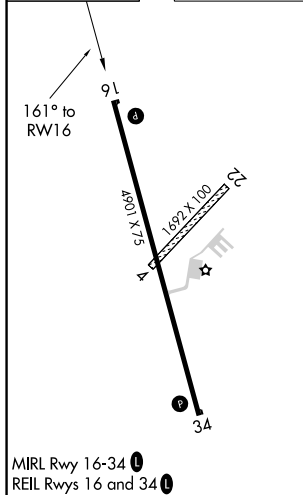

4 NM Holding Pattern

NOCSI

CIVIM

3000

341°

161°

3000

GP 3.00° TCH 46

5.9 NM

5.2 NM

RW16

FOVOB

CATEGORY	A	B	C	D
LPV DA	1546-1	250 (300-1)		NA
RNAV/ VNAV	1730-1½	434 (500-1½)		NA
RNAV MDA	2020-1	724 (800-1)	2020-2 724 (800-2)	NA
CIRCLING	2020-1	720 (800-1)	2020-2 720 (800-2)	NA

CRESTON, IOWA
Amdt 1C 17SEP15

41°01'N-94°22'W

CRESTON MUNI (CSQ)
RNAV (GPS) RWY 16

NC-3, 15 MAY 2025 to 12 JUN 2025

NC-3, 15 MAY 2025 to 12 JUN 2025