

JACKSONVILLE, FLORIDA

AL-5570 (FAA)

24137

WAAS CH 70626 W14A	APP CRS 136°	Rwy Idg 7701 TDZE 27 Apt Elev 30
--	------------------------	---

RNAV (GPS) Z RWY 14
JACKSONVILLE INTL (JAX)


RNP APCH-GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. For inop ALS, increase LPV visibility all Cats to $\frac{7}{8}$ SM and increase LNAV/VNAV visibility all Cats and LNAV Cats A and B visibility to 1 SM. Rwy 14 helicopter visibility reduction below $\frac{3}{4}$ SM NA.

MALS

MISSED APPROACH:
Climb to 500 then climb
ing left turn to 2000
direct YEJWO and hold.

D-ATIS 125.85	JACKSONVILLE APP CON 119.0 269.9	JACKSONVILLE TOWER 118.3 317.7	GND CON 121.9 348.6	CLNC DEL 119.5 290.275	CPDLC
------------------	-------------------------------------	-----------------------------------	------------------------	---------------------------	-------

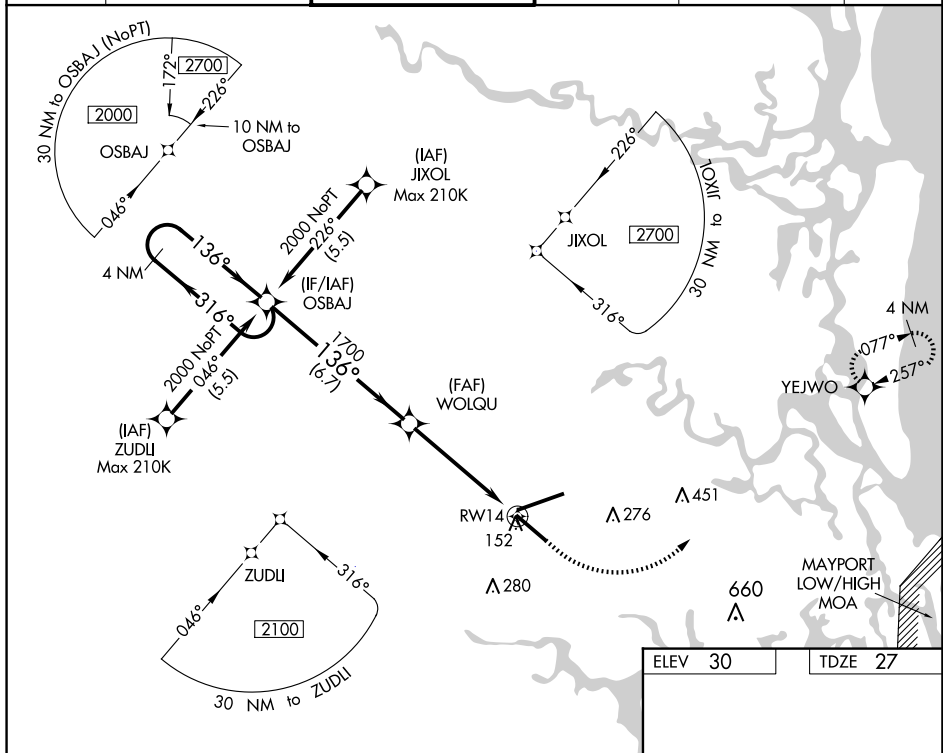

4 NM Holding Pattern

VGS and RNAV glidepath not coincident (VGS Angle 3.00/TCH 70).

OSBAJ

WOLQU

1700

1200

1.2 NM to RW14

500

2000

YEJWO

136°

316°

136°

1700

6.7 NM

3.9 NM

1.2

CATEGORY	A	B	C	D
LPV DA		306- ³ / ₄	279 (300- ³ / ₄)	
LNAV/VNAV DA		388- ³ / ₄	361 (400- ³ / ₄)	
LNAV MDA	480- ³ / ₄	453 (500- ³ / ₄)	480- ⁷ / ₈	453 (500- ⁷ / ₈)
CIRCLING	520-1	490 (500-1)	580-1 ¹ / ₂ 550 (600-1 ¹ / ₂)	580-2 550 (600-2)

REIL Rwy 32

TDZ/CL Rws 8, 14, and 26

HIRL Rws 8-26 and 14-32

JACKSONVILLE, FLORIDA

Amdt 2D 16MAY24

30°30'N-81°41'W

JACKSONVILLE INTL (JAX)

RNAV (GPS) Z RWY 14