

WAAS
CH **49032**
W14A

APP CRS
142°

Rwy Idg
TDZE **1132**
Apt Elev **1136**

RNAV (GPS) RWY 14

MORRIS MUNI/CHARLIE SCHMIDT FLD (MOX)

RNP APCH-GPS.

▼



Baro-VNAV and VDP NA when using BBB altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use BBB altimeter setting and increase LPV and LNAV/VNAV DA to 1440 feet. Increase all MDAs 60 feet and visibility LNAV Cat C ½ SM and visibility Circling Cat C ¼ SM.

MISSED APPROACH: Climb to 3500 direct EXJUP and hold.

AWOS-3PT
118.6

MINNEAPOLIS CENTER
126.1 269.2

UNICOM
122.8 (CTAF) 0

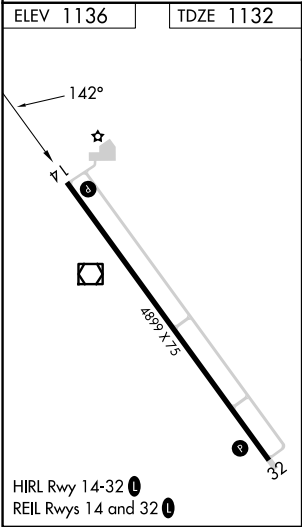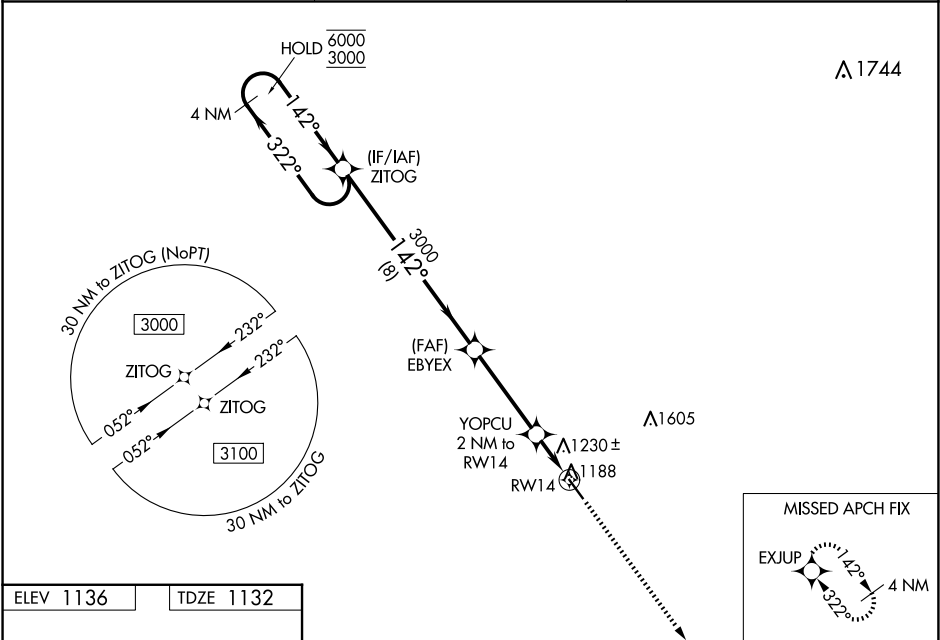

CATEGORY				
LPV DA		1382-1	250 (300-1)	NA
LNAV/VNAV DA		1382-1	250 (300-1)	NA
LNAV MDA		1480-1	348 (400-1)	NA
CIRCLING	1560-1	1600-1	1860-2	NA
	424 (500-1)	464 (500-1)	724 (800-2)	