

|                                        |                        |                                                     |
|----------------------------------------|------------------------|-----------------------------------------------------|
| WAAS<br>CH <b>93732</b><br><b>W32A</b> | APP CRS<br><b>322°</b> | Rwy Idg<br>TDZE <b>1130</b><br>Apt Elev <b>1136</b> |
|----------------------------------------|------------------------|-----------------------------------------------------|

RNAV (GPS) RWY 32

MORRIS MUNI/CHARLIE SCHMIDT FLD (MOX)

RNP APCH - GPS.



▼

⚠

Baro-VNAV and VDP NA when using BBB altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use BBB altimeter setting and increase LPV DA to 1380 feet and LNAV/VNAV DA to 1477 feet. Increase all MDAs 60 feet and visibility LNAV Cat C ½ SM and visibility Circling Cat C ¼ SM.

MISSED APPROACH: Climb to 3000 direct ZITOG and hold.

|                          |                                          |                                 |
|--------------------------|------------------------------------------|---------------------------------|
| AWOS-3PT<br><b>118.6</b> | MINNEAPOLIS CENTER<br><b>126.1 269.2</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|--------------------------|------------------------------------------|---------------------------------|

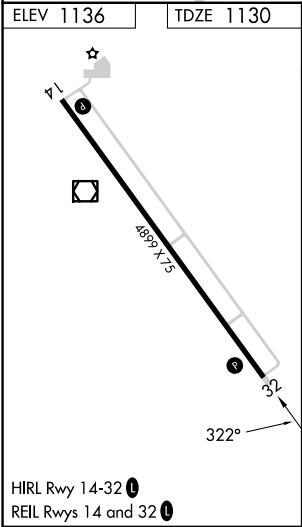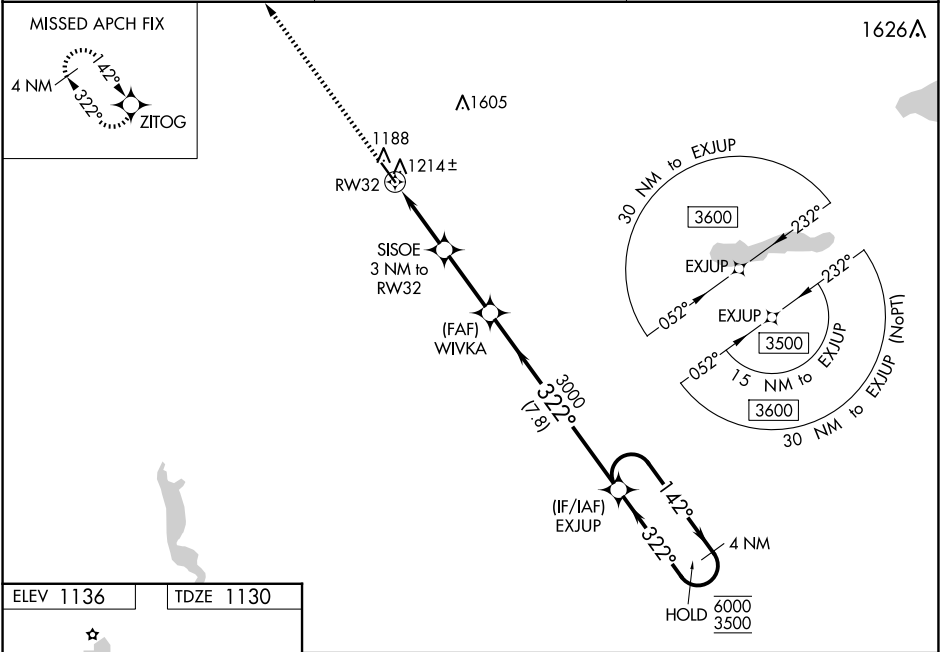

|              |                       |                       |                       |       |      |       |                      |      |      |          |        |
|--------------|-----------------------|-----------------------|-----------------------|-------|------|-------|----------------------|------|------|----------|--------|
| 3000         | ZITOG                 | SISOE                 | 3 NM to RW32          | WIVKA | 3000 | EXJUP | 4 NM Holding Pattern | 6000 | 3500 | GP 3.00° | TCH 40 |
| 1 NM         | 2 NM                  | 2.8 NM                | 7.8 NM                |       |      |       |                      |      |      |          |        |
| CATEGORY     | A                     | B                     | C                     | D     |      |       |                      |      |      |          |        |
| LPV DA       | 1330-1                | 200 (200-1)           |                       | NA    |      |       |                      |      |      |          |        |
| LNAV/VNAV DA | 1419-1                | 289 (300-1)           |                       | NA    |      |       |                      |      |      |          |        |
| LNAV MDA     | 1480-1                | 350 (400-1)           |                       | NA    |      |       |                      |      |      |          |        |
| CIRCLING     | 1560-1<br>424 (500-1) | 1600-1<br>464 (500-1) | 1860-2<br>724 (800-2) | NA    |      |       |                      |      |      |          |        |