


LOC/DME I-CH 111.5 Chan 52	APP CRS 359°	Rwy ldg 5000 TDZE 343 Apt Elev 343
--	------------------------	---

ILS or LOC RWY 36

NACOGDOCHES A L MANGHAM JR RGNL (OCH)

ADF or DME required.		MALSR A5	MISSED APPROACH: Climb to 1000 then climbing left turn to 2100 direct NADOS/OC NDB and hold.
▼ ▲ NA	When local altimeter setting not received, use Lufkin altimeter setting: increase S-ILS 36 DA to 599 feet; increase all MDA 60 feet and visibility S-LOC 36 and Circling Cat C and CATEB FIX minimums S-LOC 36 and Circling Cat C ¼ SM. VDP NA when using Lufkin altimeter setting. Localizer unusable inside 0.3 NM from threshold. Autopilot coupled approach NA below 740.		
AWOS-3PT 135.625	HOUSTON CENTER 125.175 285.575	UNICOM 123.0 (CTAF) 0	

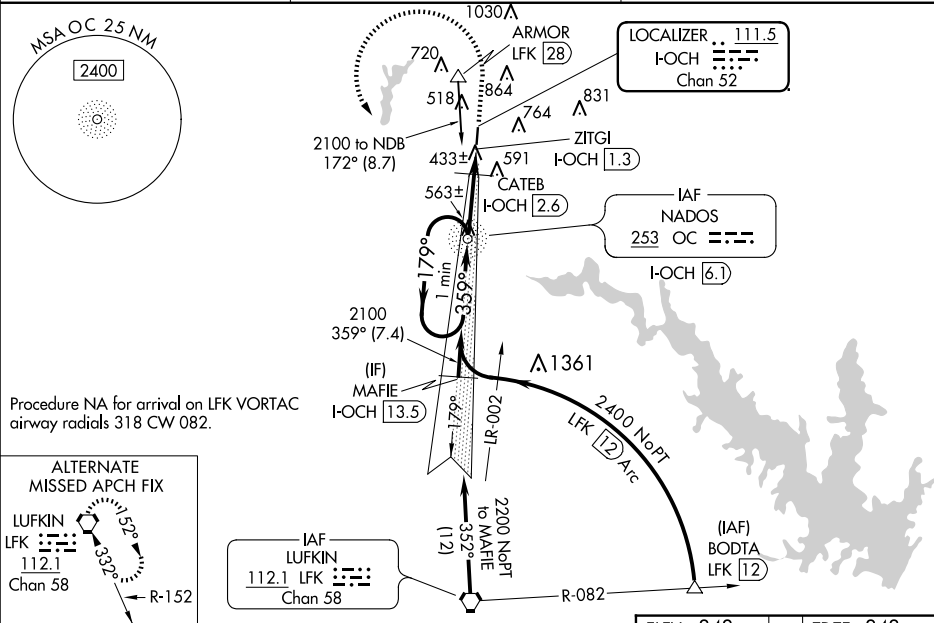

* 820 when using Lufkin altimeter setting.				ELEV 343	TDZE 343
One Minute Holding Pattern				MIRL Rwy 18-36	REIL Rwy 18
GS 3.00° TCH 53				81	
CATEB FIX MINIMUMS (DME REQUIRED)				5000 x 75	
S-ILS 36				36	
S-LOC 36				359°	
CIRCLING				FAF to MAP 4.8 NM	
S-LOC 36				Knots	
CIRCLING				Min:Sec	