RNAV (GPS) RWY 36

NACOGDOCHES A L MANGHAM JR RGNL (OCH)

WAAS	APP CRS	Rwy Idg	5000
CH 93528	359°	TDZE	343
W36A		Apt Elev	343

RNP APCH-GPS.

T A Baro-VNAV NA when using Lufkin altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C . When local altimeter setting not received, use Lufkin altimeter setting: increase LPV DA to 599 feet, LNAV/VNAV DA to 681 feet, and visibility LNAV/VNAV all Cats 1⅛ SM, increase all MDA 60 feet and visibility LNAV Cat C 1⅛ SM and Circling Cat C ¼ SM.

MALSR

MISSED APROACH: Climb to 2400 direct XOWNU and on track 352° to DRBOB and hold.

AWOS-3PT	HOUSTON CENTER	UNICOM
135.625	125.175 285.575	123.0 (CTAF) L

MISSED APCH FIX





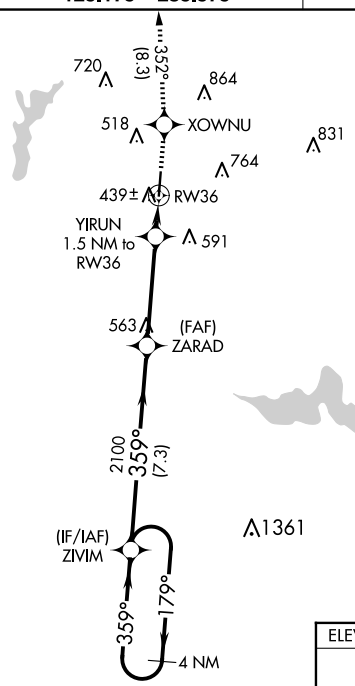

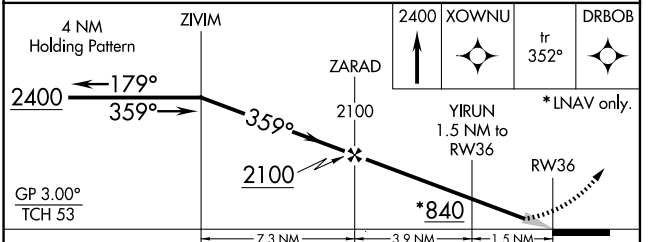

CATEGORY	A	B	C	D
LPV DA	543-½ 200 (200-½)			NA
LNAV/VNAV DA	625-½ 282 (300-½)			NA
LNAV MDA	700-½ 357 (400-½)		700-⅝ 357 (400-⅝)	NA
CIRCLING	860-1 517 (600-1)		1080-2 737 (800-2)	NA

ELEV 343 TDZE 343

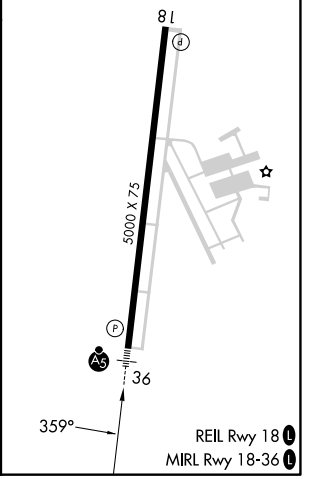

SC-5, 15 MAY 2025 to 12 JUN 2025
SC-5, 15 MAY 2025 to 12 JUN 2025