
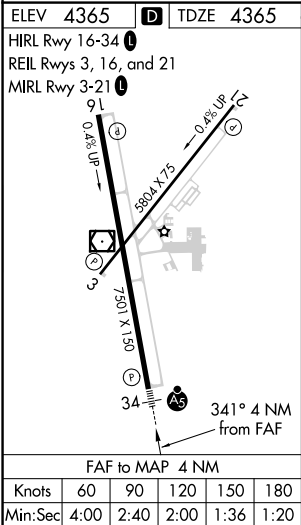


LOC/DME I-LLT 110.1 Chan 38	APP CRS 341°	Rwy Idg TDZE Apt Elev 7500 4365 4365
---	------------------------	--

ILS or LOC RWY 34
NORTHEAST WYOMING RGNL (GCC)

ADF or DME required.		MALSR 	MISSED APPROACH: Climb to 5700 then climbing left turn to 7000 on heading 150° and on GCC VOR/DME R-293 to GCC VOR/DME and hold, continue climb-in-hold to 7000.	
 Circling Rwy 3 NA at night. For inop ALS when using GILYE FIX minimums, increase Cat C/D visibility to 1½ SM.				
ASOS 124.175	DENVER CENTER 135.6 363.025	UNICOM 122.95	CTAF 118.5 	

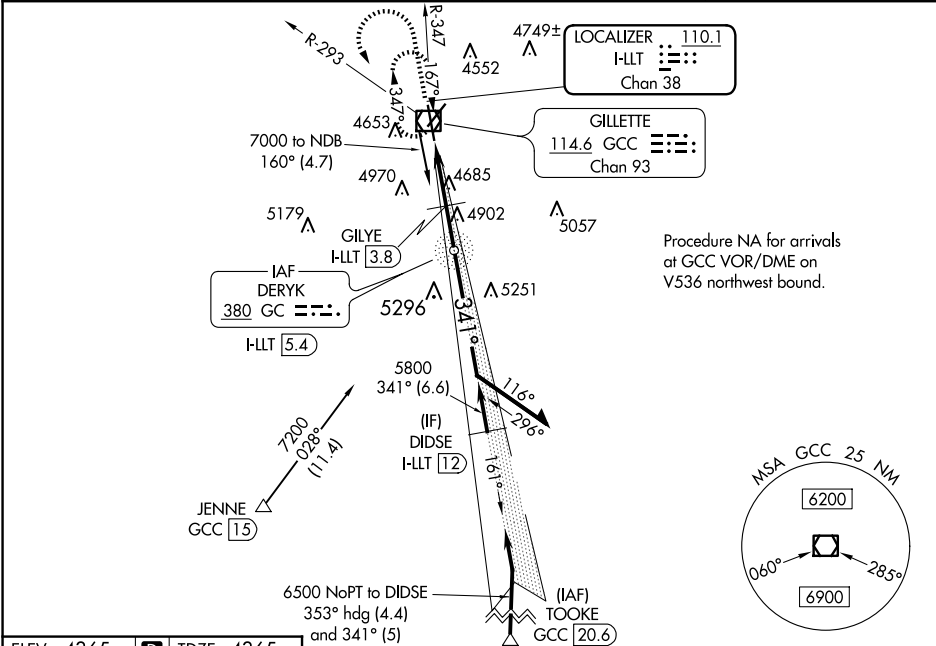

ELEV 4365	TDZE 4365	5700	7000	GCC R-293	GCC	DERYK NDB I-LLT 5.4	VGSI and ILS glidepath not coincident. (VGSI Angle 3.20/TCH 56)
HIRL Rwy 16-34	REIL Rwy 3, 16, and 21	MRL Rwy 3-21	Use I-LLT DME when on the LOC course.	*LOC only	*HLLT 3	GILYE I-LLT 3.8	Remain within 10 NM
91	0.6% UP	5804 x 75	161°	341°	5710	5240*	6600
34	0.4% UP	7501 x 150	1.6 NM	0.8	1.6 NM	5800	GS 3.00° TCH 52
341° 4 NM from FAF	FAF to MAP 4 NM						
Knots	60	90	120	150	180		
Min:Sec	4:00	2:40	2:00	1:36	1:20		
CATEGORY	A	B	C	D			
S-ILS 34	4565-½	200 (200-½)					
S-LOC 34	5240-½ 875 (900-½)	5240-¾ 875 (900-¾)	5240-2 875 (900-2)				
CIRCLING	5240-1¼ 875 (900-1¼)	5400-3 1035 (1100-3)					
GILYE FIX MINIMUMS							
S-LOC 34	4940-½ 575 (600-½)	4940-1¼ 575 (600-1¼)					
CIRCLING	5040-1 675 (700-1)	5240-1¼ 875 (900-1¼)	5400-3 1035 (1100-3)				

NW-1, 15 MAY 2025 to 12 JUN 2025

NW-1, 15 MAY 2025 to 12 JUN 2025