


WAAS CH 93828 W09A	APP CRS 094°	Rwy Idg 3882 TDZE 779 Apt Elev 781
--	------------------------	---

RNAV (GPS) RWY 9

FULTON COUNTY (USE)

RNP APCH - GPS.	MISSED APPROACH: Climb to 2100 then climbing left turn to 3000 direct DUCZZ and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling NA to Rwys 18 and 36. Rwy 9 helicopter visibility reduction below 1 SM NA. Procedure NA at night.	

AWOS-3P 127.375	TOLEDO APP CON 134.35 317.55	UNICOM 123.0 (CTAF) 0
---------------------------	--	---------------------------------

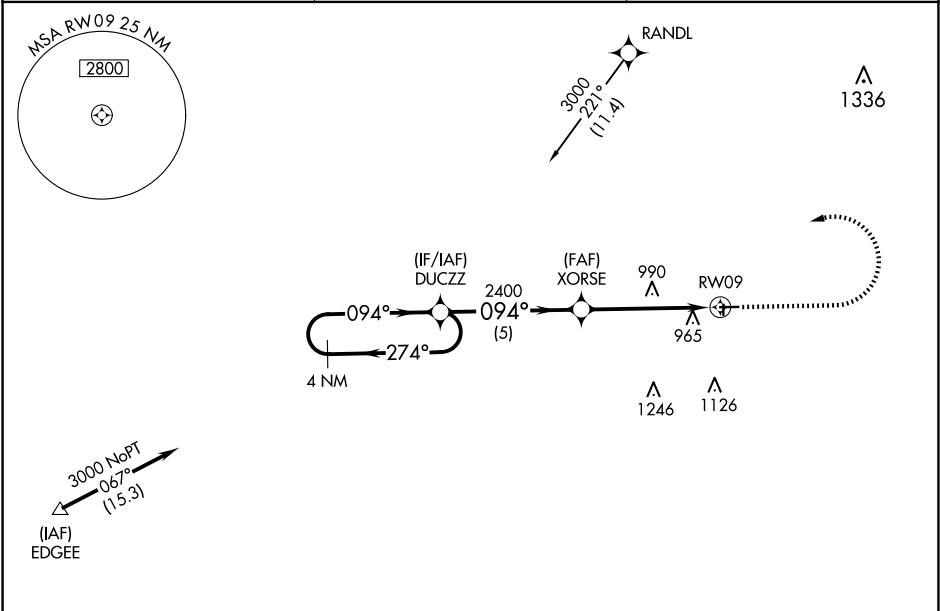

					ELEV 781	TDZE 779
4 NM Holding Pattern 3000 ←274° 094°→ GP 3.00° TCH 40 DUCZZ XORSE 2400 2400 RW09 5 NM 5 NM 2100 3000 DUCZZ VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 24). ↑ ↷ ✦					094° to RW09 81 3882 X 75 27 2115 X 75 36	
CATEGORY	A	B	C	D		
LPV DA	1109-1 330 (400-1)					
LNAV/VNAV DA	1198-1½ 419 (500-1½)					
LNAV MDA	1300-1 521 (600-1)		1300-1½ 521 (600-1½)			
CIRCLING	1320-1 539 (600-1)		1480-2 699 (700-2)	1480-2¼ 699 (700-2¼)	REIL Rwys 9 and 27 0 MIRL Rwy 9-27 0	