

LOC/DME I-SCC <u>109.3</u> Chan 30	APP CRS 058°	Rwy Idg 6500 TDZE 67 Apt Elev 67
--	------------------------	---

ILS or LOC RWY 6
DEADHORSE (SCC) (PASC)

DME required.


T For inop ALS, increase S-ILS 6 Cat E visibility to RVR 4000 and
A S-LOC 6 Cats C/D/E to RVR 4500.
 *RVR 1800 authorized with use of FD or AP or HUD to DA.

MAISR




MISSED APPROACH: Climb to 1500 then climbing right turn to 4000 on heading 170° and SCC VOR/DME R-144 to UVALL/SCC 16 DME and hold.

AFIS 118.4	ANCHORAGE CENTER 134.4 370.9	DEADHORSE RADIO 123.6 (CTAF) 0
----------------------	--	--

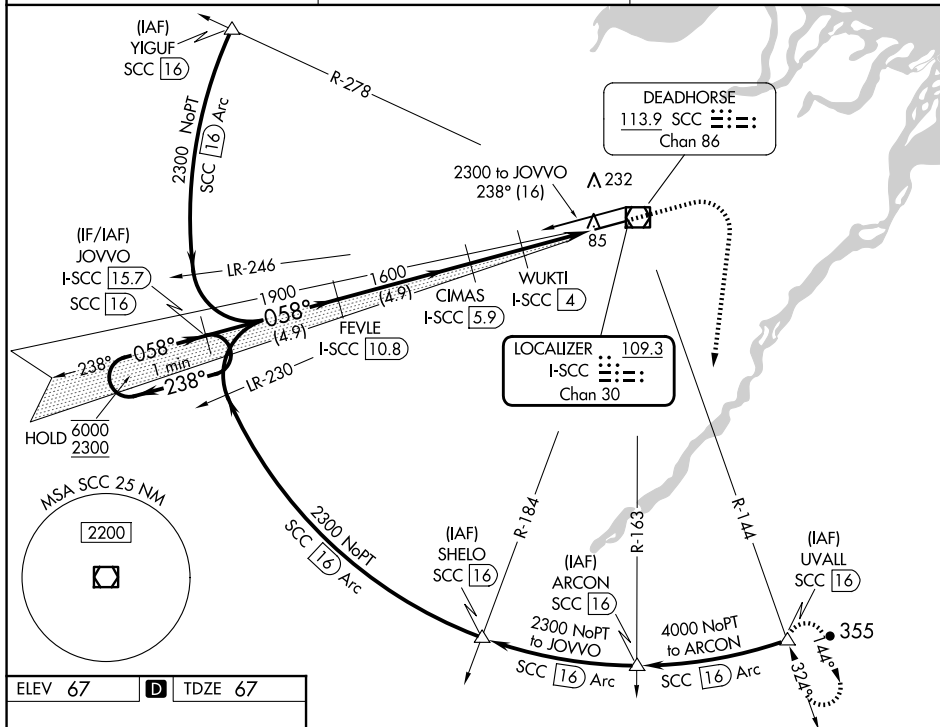

ELEV 67	D	TDZE 67
---------	----------	---------

HRL Rwy 6-24 

DEADHORSE, ALASKA

Amdt 5 05SEP24

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 50).										1500 ↑	4000 hdg 170°	SCC R-144	UVAL △			
One Minute Holding Pattern										JOVO I-SCC 15.7	FEVLE I-SCC 10.8	CIMAS I-SCC 5.9	WUKTI I-SCC 4	Use I-SCC DME when on the localizer course.	I-SCC 2	I-SCC 1.3
6000 ← 238°										058°	1900	1600	1600	980		
2300 058° →																
GS 3.00° TCH 58																
										4.9 NM	4.9 NM	1.9 NM	1.9 NM	0.8		
CATEGORY		A		B		C		D		E						
S-ILS 6 *		267/24 200 (200-1/2)														
S-LOC 6		360/24 293 (300-1/2)														
C CIRCLING		540-1 473 (500-1)		580-1 1/2 513 (600-1 1/2)		620-2 553 (600-2)										

DEADHORSE, ALASKA

Amdt 5 05SEP24

70°12'N-148°28'W

DEADHORSE (SCC) (PASC)

ILS or LOC RWY 6