

NDB OOC	APP CRS	Rwy Idg	5003
407	343°	TDZE	121
		Apt Elev	121

NDB RWY 35

NATCHITOCHES RGNL (IER)

▼


▲NA

Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Alexandria Intl altimeter setting: Increase all MDA 100 feet and S-35 Cat C visibility ½ SM and Circling Cat C visibility ½ SM. For inoperative ODALS increase S-35 Cat C visibility ½ mile. Inoperative table does not apply to S-35 Cat A/B.

ODALS

MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 direct OOC NDB and hold.

AWOS-3	POLK APP CON	GCO	UNICOM
119,025	125.4 302.2	135,075	122.8 (CTAF) 0

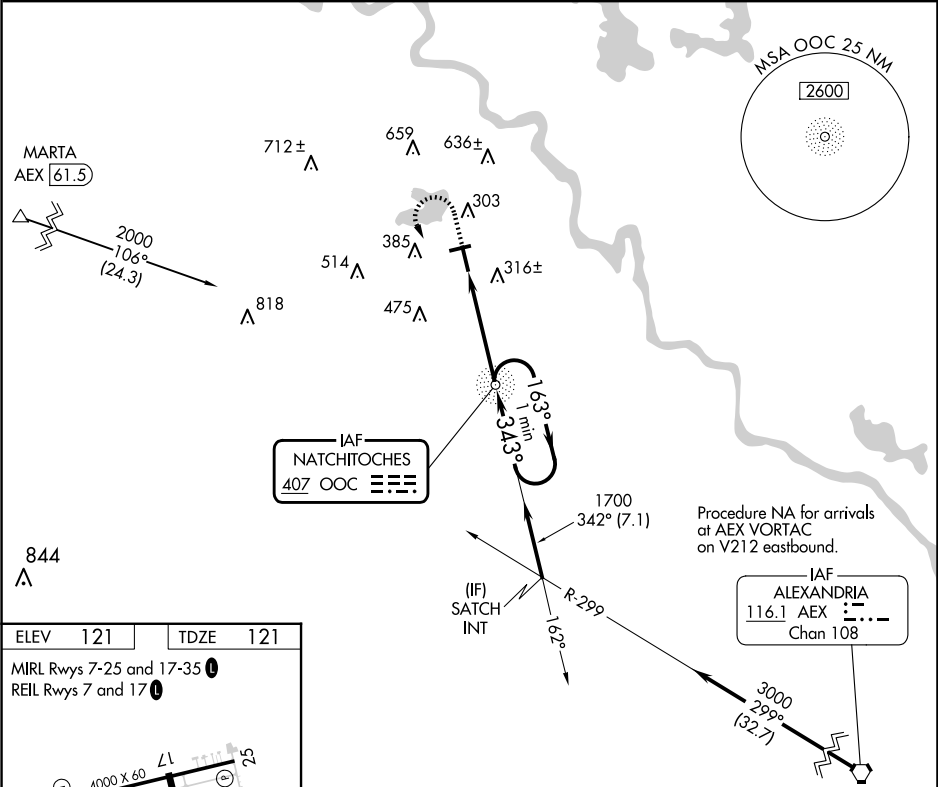

ELEV	121	TDZE	121
------	-----	------	-----

MIRL Rwy 7-25 and 17-35

REIL Rwy 7 and 17

4000 X 60 25 7 4 5003 X 150 35 343°

FAF to MAP 4.2 NM

Knots	60	90	120	150	180
Min:Sec	4:12	2:48	2:06	1:41	1:24

1000	2000	OOO	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 43).

OOO NDB

One Minute Holding Pattern

163° 2000 343° 1700 3.43° TCH 43 4.2 NM

CATEGORY	A	B	C	D
S-35	720-1	599 (600-1)	720-1½ 599 (600-1½)	NA
CIRCLING	720-1 599 (600-1)	740-1 619 (700-1)	860-2 739 (800-2)	NA

SC-4, 15 MAY 2025 to 12 JUN 2025

SC-4, 15 MAY 2025 to 12 JUN 2025