

APP CRS
301°

Rwy Idg
TDZE
1070

Apt Elev
1086

RNAV (GPS) RWY 30

MONROE MUNI (EFT)

RNP APCH-GPS.



When local altimeter setting not received, use Altimeter setting and increase all MDA 100 feet, increase LNAV Cat C/D and Circling Cat C visibility ¼ mile.
VDP NA when using Altimeter setting. Rwy 30 helicopter visibility reduction below ¾ SM NA. Circling to Rwy 2-20 NA at night.

MISSED APPROACH:
Climbing left turn to 3000
direct DAVIS and hold.

AWOS-3
118.375

ROCKFORD APP CON
126.0 327.0

UNICOM
123.05 (CTAF) 0

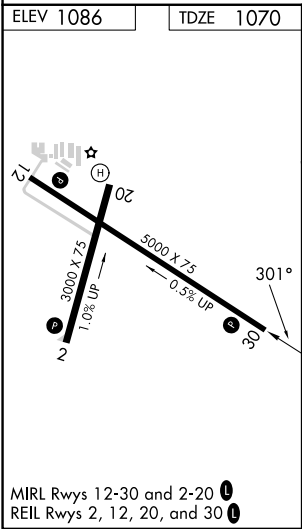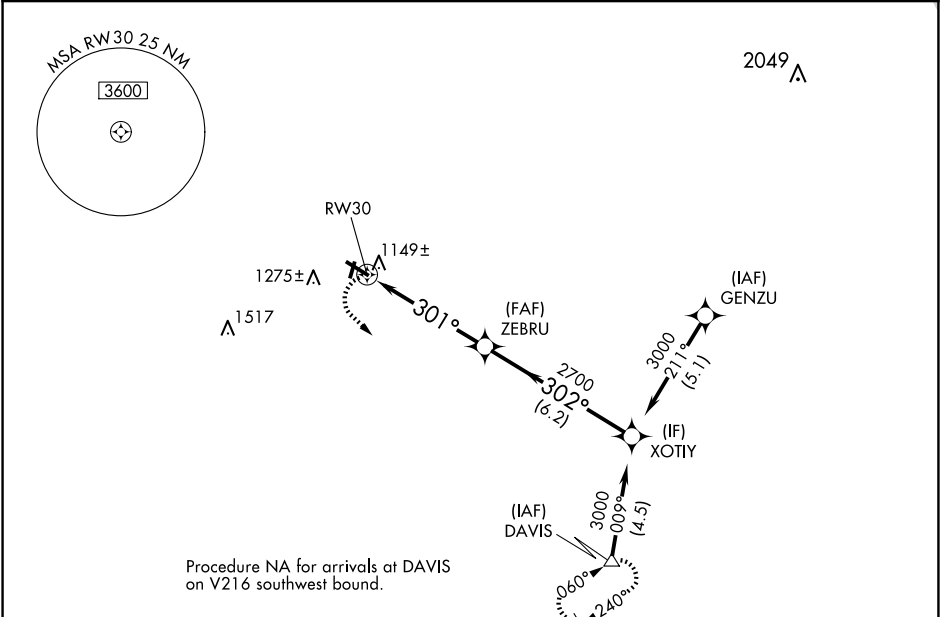

3000 DAVIS

XOTIY 3000

ZEBRU 2700

1.2 NM to RW30

301°

302°

3.04° TCH 42°

1.2 3.8 NM 6.2 NM

Procedure Turn NA

CATEGORY	A	B	C	D
LNAV MDA	1480-1	410 (400-1)	1480-1¼	410 (400-1¼)
CIRCLING	1540-1 454 (500-1)	1640-1 554 (600-1)	1640-1½ 554 (600-1½)	1640-2 554 (600-2)