

|                                        |                        |                                                 |             |
|----------------------------------------|------------------------|-------------------------------------------------|-------------|
| WAAS<br>CH <b>73046</b><br><b>W35A</b> | APP CRS<br><b>347°</b> | Rwy Idg<br>TDZE <b>70</b><br>Apt Elev <b>70</b> | <b>3176</b> |
|----------------------------------------|------------------------|-------------------------------------------------|-------------|

RNAV (GPS) RWY 35



UNIVERSITY (EDU)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Procedure NA at night. Rwy 35 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 540, then climbing left turn to 2500 direct VOICE and hold, continue climb-in-hold to 2500.

|                          |                                       |                                   |
|--------------------------|---------------------------------------|-----------------------------------|
| AWOS-3<br><b>119.025</b> | TRAVIS APP CON<br><b>126.6 281.45</b> | UNICOM<br><b>123.075 (CTAF) 0</b> |
|--------------------------|---------------------------------------|-----------------------------------|

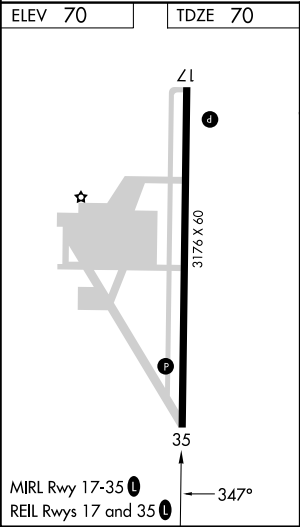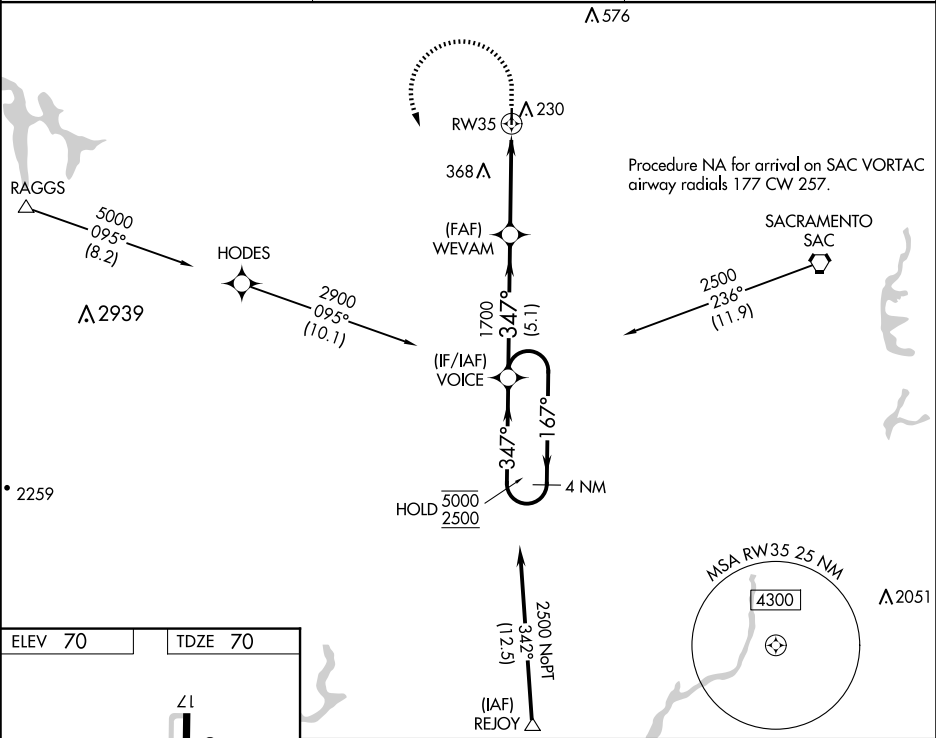

|                                                                     |       |             |   |               |           |            |
|---------------------------------------------------------------------|-------|-------------|---|---------------|-----------|------------|
| VGSI and RNAV glidepath not coincident<br>(VGSI Angle 3.25/TCH 33). |       |             |   | 540<br>↑      | 2500<br>↖ | VOICE<br>✦ |
| 4 NM<br>Holding Pattern                                             |       |             |   |               |           |            |
| 5000 ← 167°<br>2500 → 347°                                          |       |             |   | WEVAM<br>1700 |           |            |
| GP 3.75°<br>TCH 40                                                  |       |             |   | 1700<br>✖     |           |            |
|                                                                     |       |             |   | RW35<br>↘     |           |            |
|                                                                     |       |             |   | 5.1 NM 4 NM   |           |            |
| CATEGORY                                                            | A     | B           | C | D             |           |            |
| LPV DA                                                              | 355-1 | 285 (300-1) |   | NA            |           |            |
| LNAV/<br>VNAV                                                       | 376-1 | 306 (400-1) |   | NA            |           |            |
| LNAV MDA                                                            | 520-1 | 450 (500-1) |   | NA            |           |            |