

WAAS CH 97528 W32A	APP CRS 324°	Rwy Idg TDZE 1287 Apt Elev 1288
--	------------------------	---

RNAV (GPS) RWY 32


STAPLES MUNI (SAZ)

⚠ Circling to Rwy 14 NA at night. Baro-VNAV NA when using Pine River altimeter setting.


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Pine River altimeter setting and increase all DA 64 feet and all MDA 80 feet and increase LPV all Cats, LNAV/VNAV all Cats, LNAV Cat C and Circling Cat C visibility ¼ SM. Rwy 32 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 3000 direct
HUDLA and hold.

AWOS-3 118.325	MINNEAPOLIS CENTER 118.05 239.0	GCO 121.725	CTAF 122.9
--------------------------	---	-----------------------	----------------------

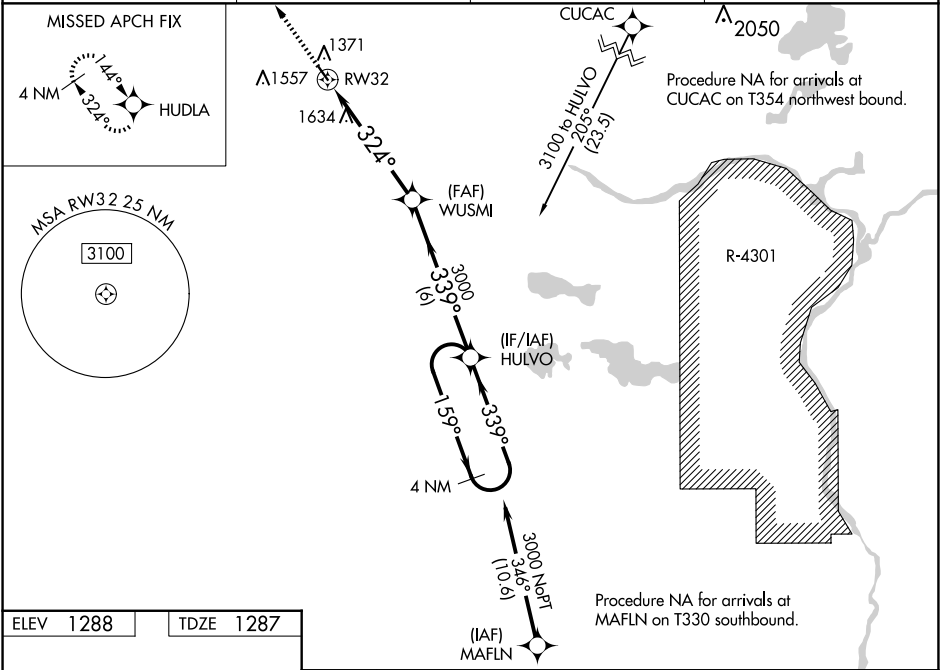

ELEV 1288	TDZE 1287
------------------	------------------

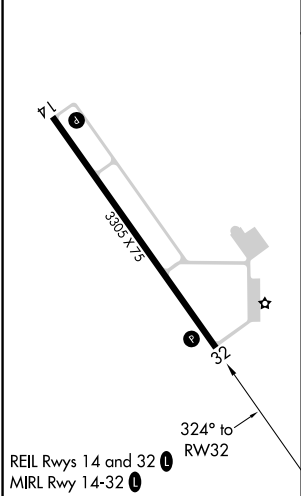

3000	HUDLA	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 27).			
		WUSMI	HULVO	4 NM Holding Pattern	
		3000	3000	159°	3000
		324°	339°	339°	GP 3.00° TCH 40
		5.3 NM	6 NM		
CATEGORY	A	B	C	D	
LPV DA	1592-1 305 (400-1)				NA
LNAV/VNAV DA	1965-2½ 678 (700-2½)				NA
LNAV MDA	1900-1	613 (700-1)	1900-1¾ 613 (700-1¾)	NA	
CIRCLING	1900-1 612 (700-1)	1940-1 652 (700-1)	1940-1¾ 652 (700-1¾)	NA	