ILS or LOC/NDB RWY 10
THOMSON/McDUFFIE COUNTY (HQU)

LOC I-AAQ	APP CRS	Rwy ldg	5215
110.75	097°	TDZE	467
		Apt Elev	501

ADF required for procedure entry. ADF required.

When local altimeter setting not received, use Daniel Field altimeter setting: increase DA to 916 feet and visibility ⅛ SM; increase all MDAs 80 feet and visibility S-LOC 10 Cats C/D and Circling Cat C ¼ SM, and Circling Cat D ½ SM.

NA

MISSED APPROACH: Climb to 1200 then climbing left turn to 2400 direct AA NDB and hold.

AWOS-3	AUGUSTA APP CON ★	UNICOM
120.625	124.45 270.3	122.8 (CTAF) L

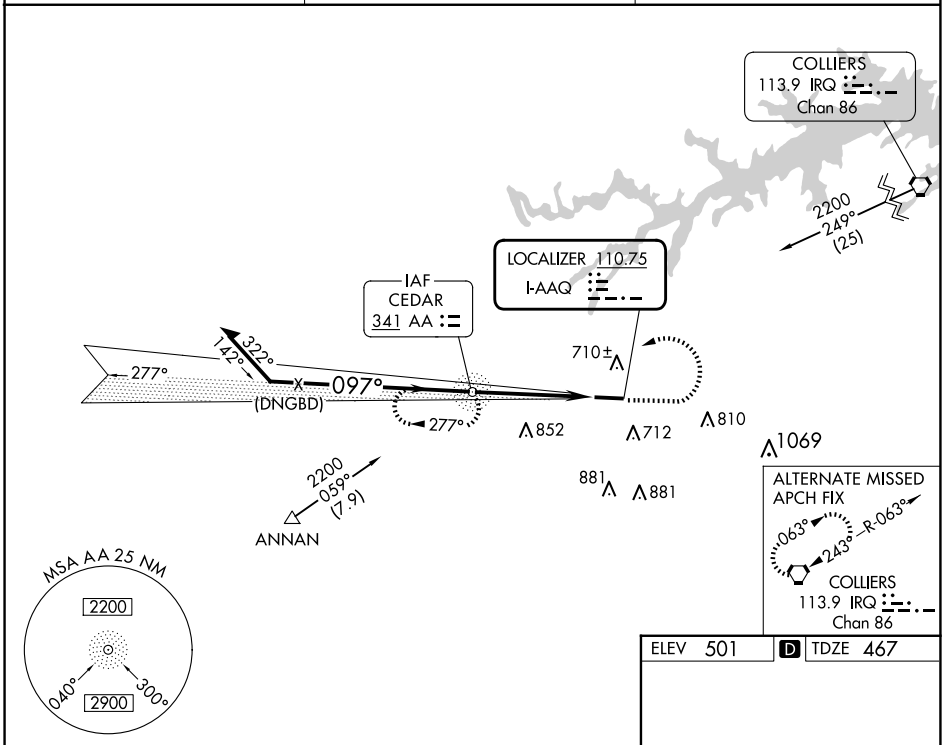

ELEV 501 D TDZE 467

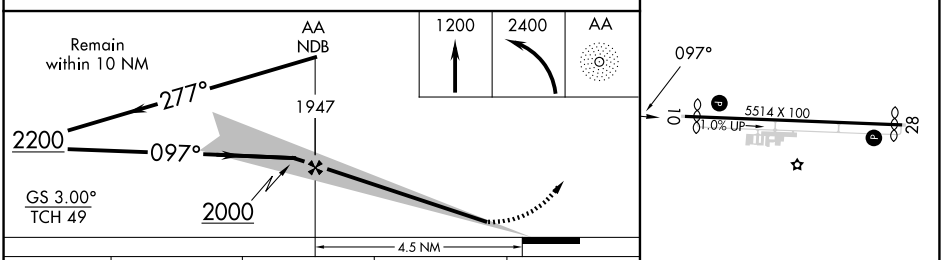

HIRL Rwy 10-28 L

CATEGORY	A	B	C	D
S-ILS 10	849-1¼ 382 (400-1¼)			
S-LOC 10	960-1 493 (500-1)		960-1⅜ 493 (500-1⅜)	
C CIRCLING	1060-1 559 (600-1)	1080-1 579 (600-1)	1160-1¾ 659 (700-1¾)	1240-2¼ 739 (800-2¼)

FAF to MAP 4.5 NM

Knots	60	90	120	150	180
Min:Sec	4:30	3:00	2:15	1:48	1:30

SE-4, 15 MAY 2025 to 12 JUN 2025