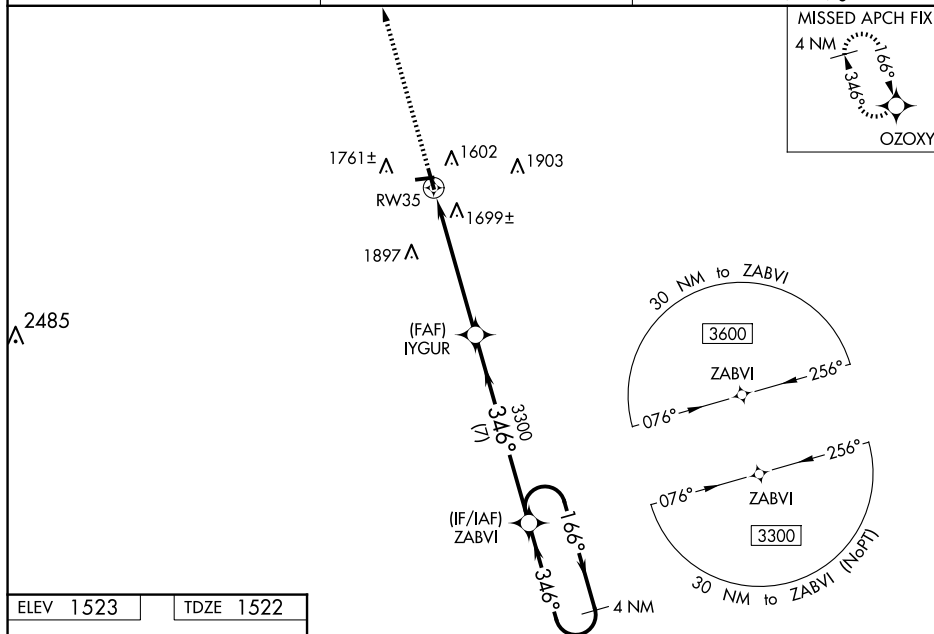


RNAV (GPS) RWY 35


LANGLADE COUNTY (AIG)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C .
▲ Baro-VNAV and VDP NA when using AUW altimeter setting. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use AUW altimeter setting and increase LPV DA to 1877 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 2124 feet and all visibilities ⅓ SM. Increase all MDAs 120 feet and LNAV visibility Cat C/D ⅓ SM, and Circling visibility Cat C/D ½ SM.

MISSED APPROACH:
Climb to 3400 direct
OZODY and hold.

UNICOM
122.8 (CTAF) **L**


TDZE 1522



MIRL Rwy 17-35 and 9-27 L

3400	OZOXY
	

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 36).

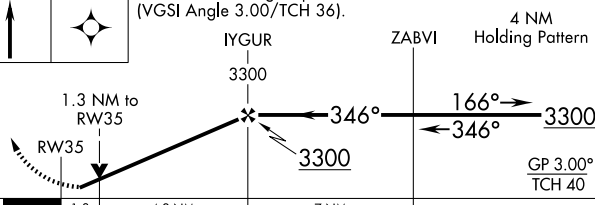

CATEGORY	A	B	C	D
LPV DA	1772-1	250 (300-1)		
LNAV/ VNAV DA	2019-1 ³ / ₄	497 (500-1 ³ / ₄)		
LNAV MDA	1960-1 438 (500-1)	1960-1 ¹ / ₄ 438 (500-1 ¹ / ₄)		
CIRCLING	2120-1 597 (600-1)	2260-2 737 (800-2)	2260-2 ¹ / ₄ 737 (800-2 ¹ / ₄)	