

MILFORD, IOWA

AL-6455 (FAA)

23278

VOR/DME SPW 115.15 Chan 98 (Y)	APP CRS 005°	Rwy Idg TDZE Apt Elev N/A N/A 1439
--	------------------------	--


VOR-A
FULLER(4D8)

DME required. RADAR required for procedure entry.

NA Circling NA to Rwys 18 and 36. Procedure NA at night.
Use Spencer altimeter setting, when not received, use
Estherville altimeter setting and increase all MDA 40 feet.

MISSED APPROACH: Climbing right turn to 3000 direct
SPW VOR/DME and hold.

SPW ASOS 126.625	MINNEAPOLIS CENTER 127.75 257.7	CTAF 122.9
----------------------------	---	----------------------

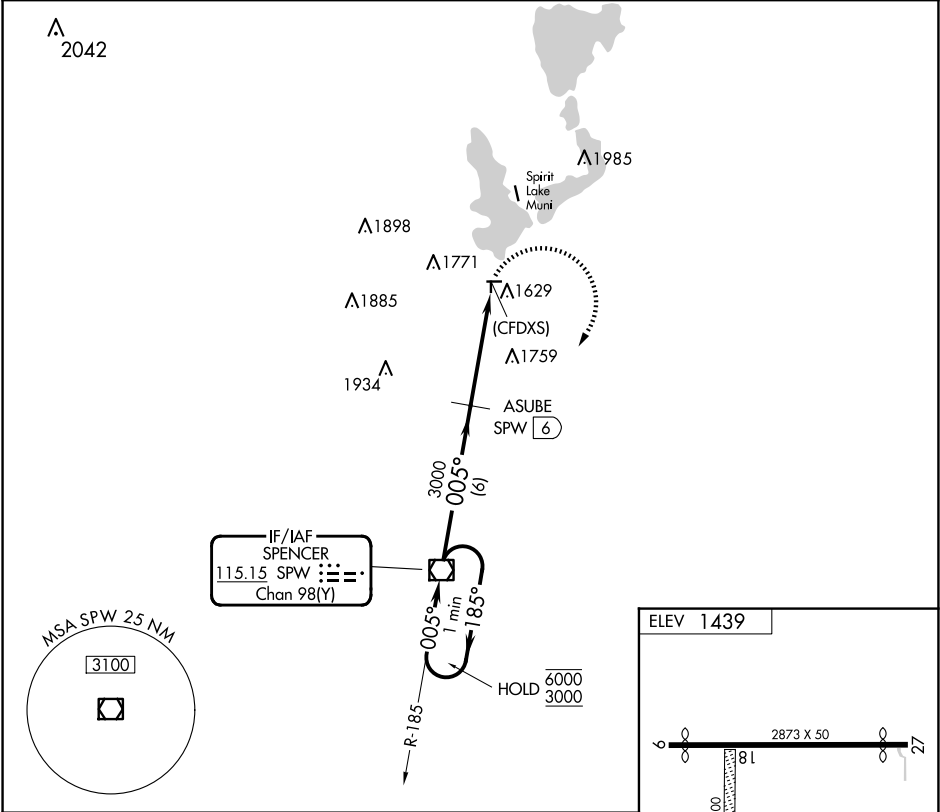

One Minute Holding Pattern		SPW VOR/DME	ASUBE SPW 6	3000	SPW
6000 3000		185° 005°	005°	3000	
6 NM			4.4 NM		
CATEGORY	A	B	C	D	FAF to MAP 4.4 NM
C CIRCLING	2100-1	661 (700-1)	NA		Knots 60 90 120 150 180 Min:Sec 4:24 2:56 2:12 1:46 1:28

MILFORD, IOWA
Amdt 1 03JAN19

43°20'N-95°10'W

FULLER(4D8)
VOR-A

NC-3, 15 MAY 2025 to 12 JUN 2025

NC-3, 15 MAY 2025 to 12 JUN 2025