


WAAS CH 65824 W04A	APP CRS 040°	Rwy Idg TDZE 66 Apt Elev 70	5007
--	------------------------	---	-------------

RNAV (GPS) RWY 4

SUFFOLK EXEC (SFQ)

RNP APCH. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.		MISSED APPROACH: Climb to 600 then climbing left turn to 2000 direct OLUCE and hold.
AWOS-3 119.375	NORFOLK APP CON 127.9 269.425	UNICOM 122.7 (CTAF)

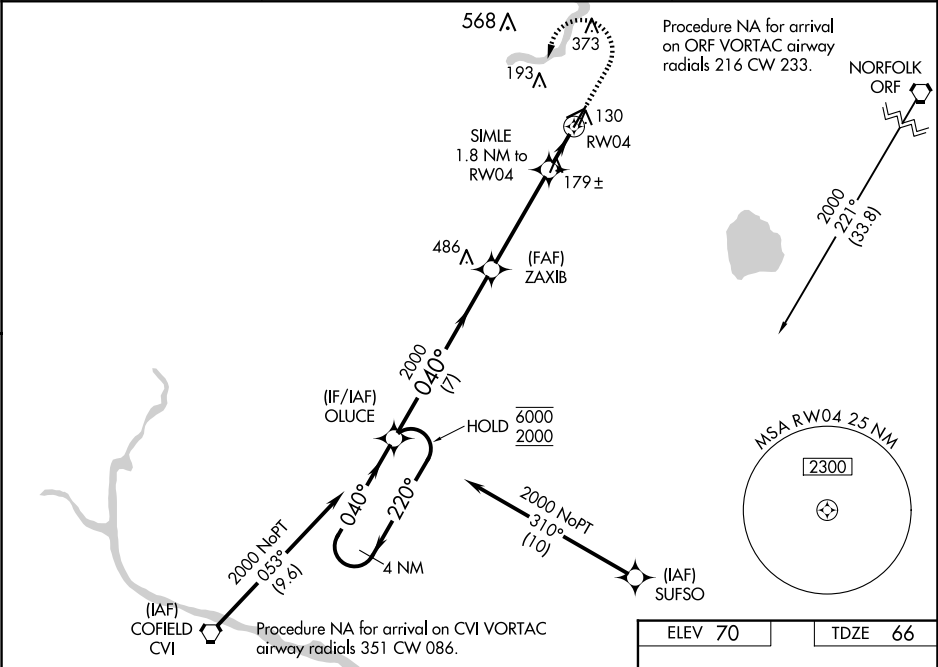

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 39).		600	2000	OLUCE
4 NM Holding Pattern		OLUCE	ZAXIB	SIMLE 1.8 NM to RW04
GP 3.00° TCH 45		2000	2000	*1.1 NM to RW04
7 NM		4.1 NM	0.7	1.1
CATEGORY	A	B	C	D
LPV DA	322-7/8 256 (300-7/8)			
LNAV/VNAV DA	474-1 3/8 408 (500-1 3/8)			
LNAV MDA	440-1 374 (400-1)			
CIRCLING	500-1 430 (500-1)	560-1 490 (500-1)	680-1 3/4 610 (700-1 3/4)	680-2 610 (700-2)

