



|                                        |                        |                             |                                         |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|
| WAAS<br>CH <b>42926</b><br><b>W22A</b> | APP CRS<br><b>217°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5505</b><br><b>706</b><br><b>706</b> |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|

RNAV (GPS) RWY 22

SPRINGFIELD ROBERTSON COUNTY (M91)

|                                                                                                                                          |  |                                                             |
|------------------------------------------------------------------------------------------------------------------------------------------|--|-------------------------------------------------------------|
| RNP APCH - GPS.                                                                                                                          |  | MISSED APPROACH:<br>Climb to 3000 direct<br>INICA and hold. |
| Rwy 22 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems,<br>NA LNAV/VNAV NA below -16°C or above 39°C. |  |                                                             |

|                          |                                          |                                 |
|--------------------------|------------------------------------------|---------------------------------|
| AWOS-3<br><b>120.675</b> | NASHVILLE APP CON<br><b>119.35 372.0</b> | UNICOM<br><b>123.0 (CTAF) 0</b> |
|--------------------------|------------------------------------------|---------------------------------|

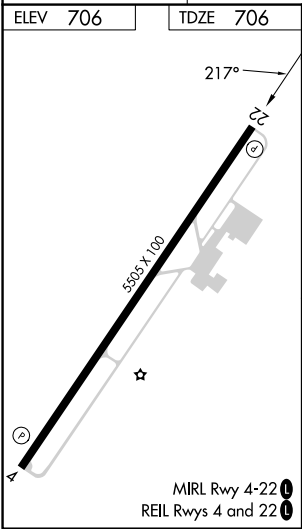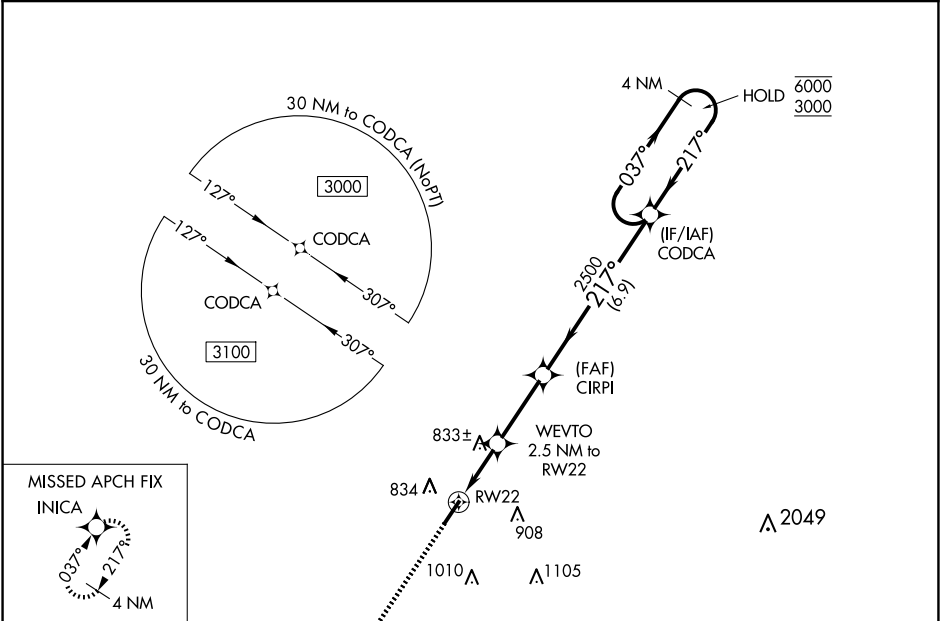

|                   |  |                                                                                             |  |  |  |
|-------------------|--|---------------------------------------------------------------------------------------------|--|--|--|
| ELEV 706 TDZE 706 |  | 3000 INICA                                                                                  |  |  |  |
| 217°              |  | RW22                                                                                        |  |  |  |
| 5505 X 100        |  | WEVTO 2.5 NM to RW22                                                                        |  |  |  |
| 1 NM              |  | CIRPI 2500                                                                                  |  |  |  |
| 1.5 NM            |  | CODCA 4 NM Holding Pattern                                                                  |  |  |  |
| 2.9 NM            |  | 037° 6000                                                                                   |  |  |  |
| 6.9 NM            |  | 217° 3000                                                                                   |  |  |  |
| GP 3.00°          |  | TCH 60                                                                                      |  |  |  |
| CATEGORY          |  | A B C D                                                                                     |  |  |  |
| LPV DA            |  | 975-7/8 269 (300-7/8)                                                                       |  |  |  |
| LNAV/VNAV DA      |  | 1010-7/8 304 (400-7/8)                                                                      |  |  |  |
| LNAV MDA          |  | 1100-1 394 (400-1) 1100-1 394 (400-1 1/8)                                                   |  |  |  |
| CIRCLING          |  | 1140-1 434 (500-1) 1160-1 454 (500-1) 1360-1 3/4 654 (700-1 3/4) 1540-2 3/4 834 (900-2 3/4) |  |  |  |