


VORTAC SLN 117.1 Chan 118	APP CRS 087°	Rwy Idg TDZE Apt Elev N/A N/A 1153
---	------------------------	--

VOR-A
ABILENE MUNI (K78)

DME required. RADAR required for procedure entry at CHALK.	MISSED APPROACH: Climb to 2600 then climbing right turn to 3000 on heading 320° and SLN VORTAC R-087 to CHALK/13.1 DME/RADAR and hold.
When local altimeter setting not received, use SLN altimeter setting and increase all MDAs 80 feet and visibility Cat C ¼ SM.	

AWOS-2 124.125	MARSHALL AAF GCA* 121.25 269.05	UNICOM 122.8 (CTAF)
--------------------------	---	-------------------------------

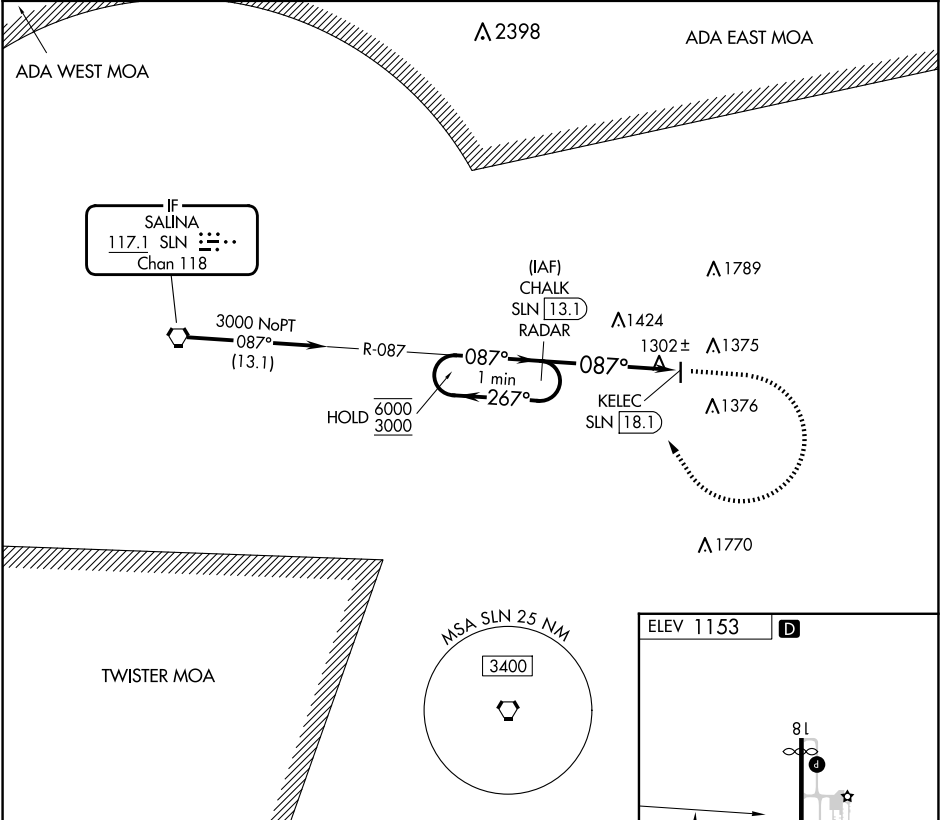

One Minute Holding Pattern	CHALK SLN 13.1 RADAR	2600	3000	SLN R-087	CHALK SLN 13.1
6000	267°	hdg 320°			
3000	087°				
				KELEC SLN 18.1	
				5 NM	
CATEGORY	A	B	C	D	
CIRCLING	1740-1	587 (600-1)	1900-2¼ 747 (800-2¼)	NA	

