


WAAS CH 49113 W35A	APP CRS 349°	Rwy ldg 5498 TDZE 1670 Apt Elev 1670
--	------------------------	---


RNAV (GPS) RWY 35
YORK MUNI (JYR)


RNP APCH. ▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. When local altimeter setting not received, use Aurora altimeter setting and increase all DA/MDA 60 feet and all LPV, all LNAV/VNAV, and Cat C LNAV visibility ¼ mile. VDP and Baro-VNAV NA when using Aurora altimeter setting.	MISSED APPROACH: Climb to 4000 direct EHJAM and hold.
--	---

AWOS-3 124.175	MINNEAPOLIS CENTER 119.4 278.8	UNICOM 122.8 (CTAF) 1
--------------------------	--	---------------------------------

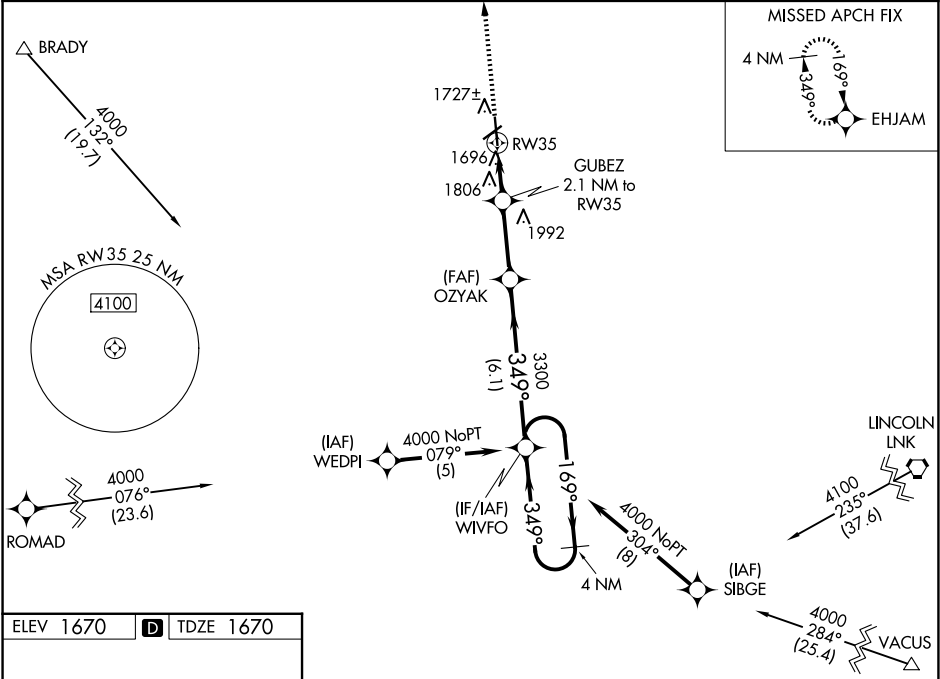

ELEV 1670	D	TDZE 1670
-----------	---	-----------

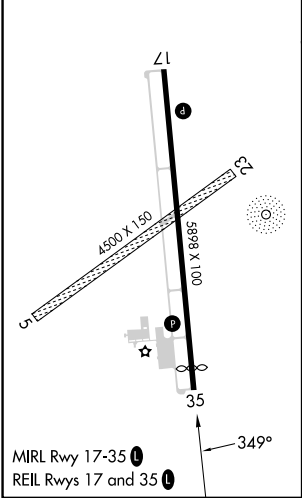

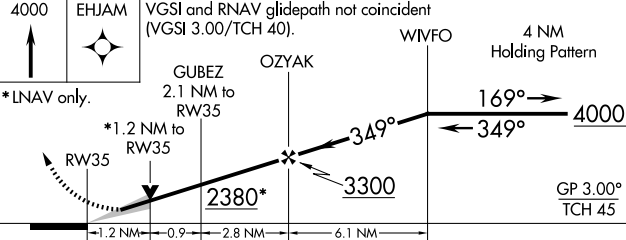4000	EHJAM	VGSI and RNAV glidepath not coincident (VGSI 3.00/TCH 40).		
				
*LNAV only.				