

LOC I-AEG	APP CRS	Rwy Idg	7398
110.1	215°	TDZE	5817
		Apt Elev	5837

ILS or LOC RWY 22

DOUBLE EAGLE II (A/E/G)

⚠


NA

When local altimeter setting not received, use Albuquerque Intl Support altimeter setting and increase all DA 94 feet, increase all MDA 100 feet, and increase visibility S-LOC 22 Cats C/D ¼ mile, Circling Cats C/D ½ mile. For inop MALSR when using Albuquerque Intl Support altimeter setting, increase visibility S-ILS 22 all Cats ¾ mile.

MALSR

MISSED APPROACH: Climb to 6500 then climbing right turn 7700 direct DUDLE LOM and hold.

ATIS	ALBUQUERQUE APP CON	DOUBLE EAGLE II TOWER ★	GND CON	CLNC DEL
119.025	127.4 253.5	120.15 (CTAF) 0	121.625	124.8 (When twr closed)

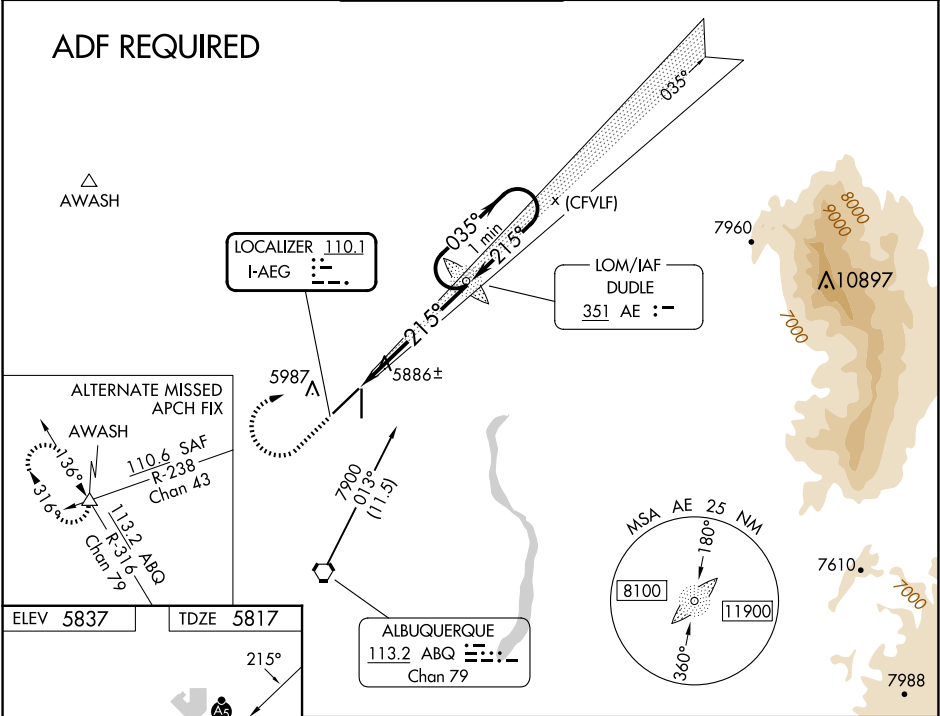

ELEV 5837	TDZE 5817
TWR 5922 215° 0.4% UP 5983 X 100 7398 X 100 35	
REIL Rwys 17 and 35 MIRL Rwys 4-22 and 17-35 FAF to MAP 5.5 NM	
Knots	60 90 120 150 180
Min:Sec	5:30 3:40 2:45 2:12 1:50
☒ CIRCLING 6400-1 563 (600-1) 6420-1½ 583 (600-1½) 6640-2½ 803 (900-2½)	

CATEGORY	A	B	C	D
S-ILS 22	6017-½ 200 (200-½)			
S-LOC 22	6140-½ 323 (400-½)			