

LOC/DME I-OPN	APP CRS	Rwy Idg	4962
109.75	301°	TDZE	796
Chan 34 (Y)		Apt Elev	798


ADF required for procedure entry.
DME or RADAR required.

For inop ALS, increase S-LOC 30 Cats C, D visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 1500 then climbing left turn to 2600 direct OP NDB and brg 120° to SINFO/I-OPN 12.9 DME/RADAR and hold.

AWOS-3 133,975	ATLANTA APP CON ★ 124.2 279.6	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

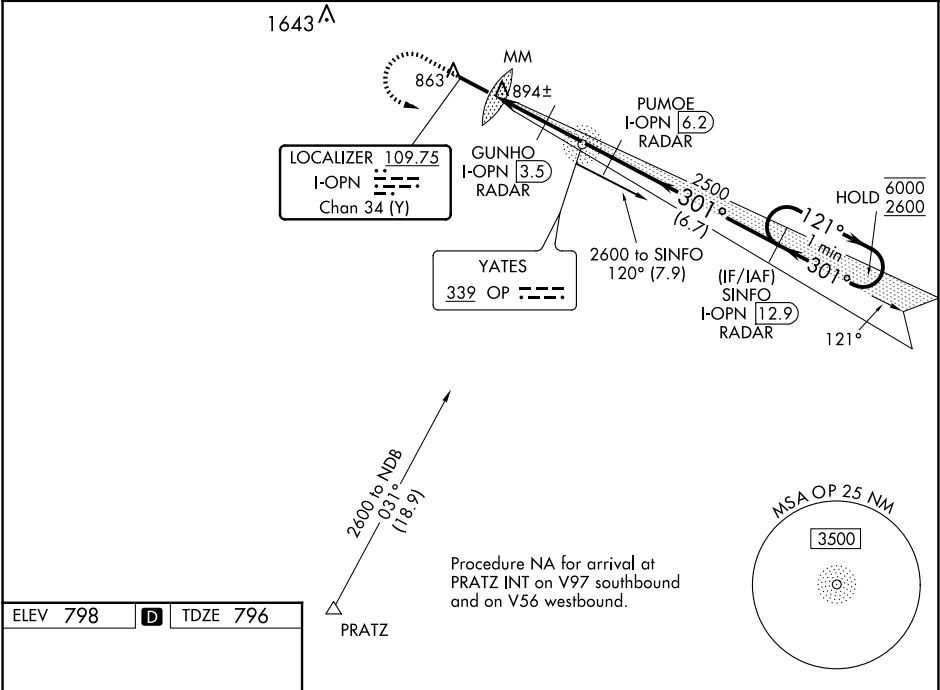

ELEV 798 D TDZE 796

MIRL Rwy 12-30 0

FAF to MAP 5.2 NM

Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44

	1500	2600	OP	SINFO	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 27).			
			brg 120°	I-OPN 12.9 RADAR	PUMOE I-OPN 6.2 RADAR	SINFO I-OPN 12.9 RADAR		
							121° → 6000	← 301° 2600
							GS 3.00° TCH 50	
							0.4 0.6 1.5 NM 2.7 NM 6.7 NM	
CATEGORY	A		B		C		D	
S-ILS 30	996-½		200 (200-½)					
S-LOC 30	1160-½		364 (400-½)		1160-⅝		364 (400-⅝)	
CIRCLING	1220-1 422 (500-1)		1260-1 462 (500-1)		1260-1½ 462 (500-1½)		1680-3 882 (900-3)	