


WAAS CH 48909 W21A	APP CRS 209°	Rwy Idg 5498 TDZE 948 Apt Elev 948
--	------------------------	---

RNAV (GPS) Z RWY 21
GEORGETOWN-SCOTT COUNTY RGNL (27K)


NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C (4° F) or above 46° C (114° F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Lexington altimeter setting and increase LPV DA to 1186, LNAV/VNAV DA to 1460, and all MDA 40 feet; increase LPV all Cats and LNAV Cats C/D and Circling Cat D visibility ¼ SM. Baro-VNAV and VDP NA with Lexington altimeter setting.

MISSED APPROACH: Climb to 3000 direct YAPUT and right turn on track 301° to SOKOC and right turn on track 049° to GENUS and hold.

AWOS-3 119,975	LEXINGTON APP CON 120.15 259.3 (040° - 220°) 120.75 298.9 (221° - 039°)				CLNC DEL 127,425	UNICOM 123.0 (CTAF) 0
-------------------	--	--	--	--	---------------------	---------------------------------

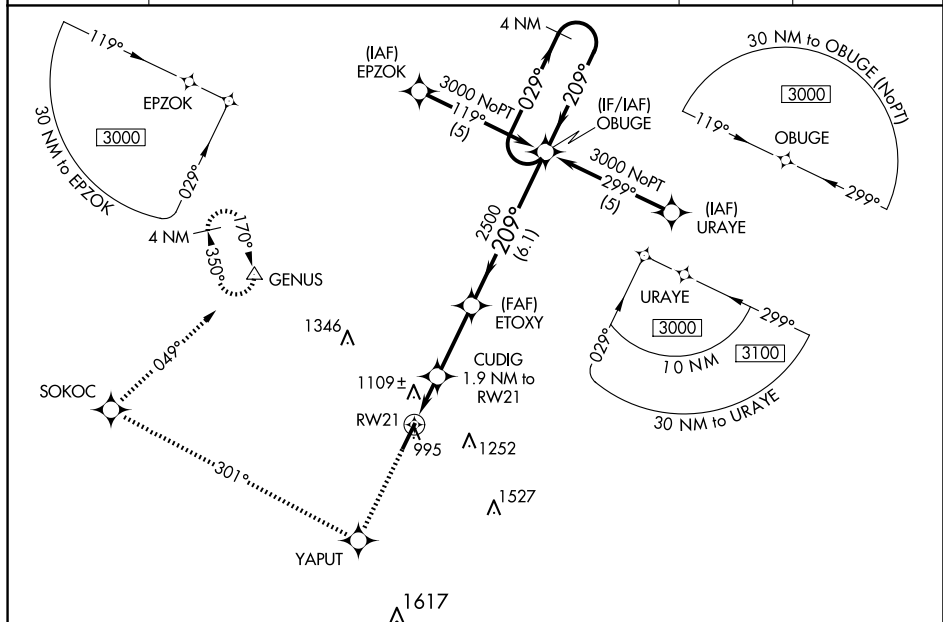

ELEV 948	TDZE 948
----------	----------

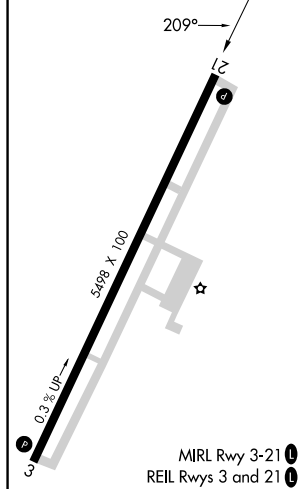

3000 ↑	YAPUT ✦	SOKOC ✦	GENUS △	4 NM Holding Pattern	
*LNAV only. OBUGE ETOXY 2500 CUDIG 1.9 NM to RW21 RW21 1.2 NM to RW21 0.7 NM 2.8 NM 6.1 NM GP 3.00° TCH 30					
CATEGORY	A	B	C	D	
LPV DA	1148-3 $\frac{3}{4}$		200 (200-3 $\frac{3}{4}$)		
LNAV/VNAV DA	1422-1 $\frac{3}{4}$		474 (500-1 $\frac{3}{4}$)		
LNAV MDA	1360-1 412 (500-1)		1360-1 $\frac{1}{4}$ 412 (500-1 $\frac{1}{4}$)		
CIRCLING	1420-1 472 (500-1)		1560-1 $\frac{3}{4}$ 612 (700-1 $\frac{3}{4}$)		1660-2 $\frac{1}{4}$ 712 (800-2 $\frac{1}{4}$)

RNAV (GPS) Z RWY 21