

WAAS CH 63022 W06A	APP CRS 067°	Rwy Idg TDZE Apt Elev	5500 665 665
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 6

SANDUSKY COUNTY RGNL (S24)

RNP APCH.


▼

NA

Baro-VNAV and VDP NA when using Toledo Express altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Toledo Express altimeter setting: increase LPV DA to 1008 feet and all visibilities ¾ SM; increase LNAV/VNAV DA to 1041 feet and all visibilities ¾ SM; increase all MDA 100 feet and LNAV visibility Cat C and D ¾ SM and Circling visibility Cat C and D ½ SM.

MISSED APPROACH:
Climb to 3000 direct
OBOZE and hold.

AWOS-3P 119.575	TOLEDO APP CON 126.1 307.0	UNICOM 123.05 (CTAF) 0
---------------------------	--------------------------------------	----------------------------------

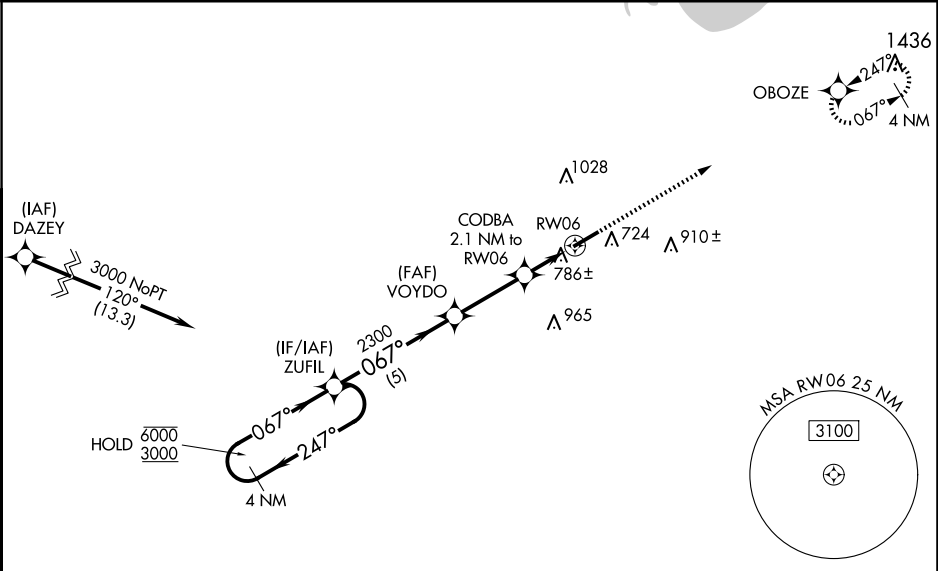

4 NM
Holding Pattern

ZUFIL

VOYDO

CODBA

RW06

6000

3000

GP 3.00°
TCH 44

247°

067°

067°

2300

2300

2.1 NM to RW06

1 NM to RW06

1 NM

1 NM

5 NM

2.9 NM

1.1 NM

1 NM

3000

OBOZE

*LNAV only

5500 X 100

067°

CATEGORY	A	B	C	D
LPV DA		915-¾	250 (300-¾)	
LNAV/VNAV DA		948-⅞	283 (300-⅞)	
LNAV MDA		1040-1	375 (400-1)	
CIRCLING	1120-1 455 (500-1)	1160-1 495 (500-1)	1380-2 715 (800-2)	1380-2¼ 715 (800-2¼)

ELEV 665

TDZE 665

REIL Rwy 6 and 24 0
MIRL Rwy 6-24 0