


|                                        |                        |                             |                                         |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|
| WAAS<br>CH <b>69238</b><br><b>W23A</b> | APP CRS<br><b>231°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>4003</b><br><b>964</b><br><b>964</b> |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|

RNAV (GPS) RWY 23  
SEARCY COUNTY (4A5)

|                                                                                                                                                                                                                                                                                                                                                                                             |                                                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
| DME/DME RNP-0.3 NA. Procedure NA at night. Circling NA SE of Rwy 5-23. Baro-VNAV NA. Use Flippin altimeter setting; when not received, use Harrison altimeter setting and increase all Cats LPV DA to 1555 and visibility 1/8 mile, LNAV/VNAV all Cats DA to 2016, and all MDA 60 feet, LNAV Cat B/C and Circling Cat C visibility 1/4 mile. Helicopter visibility reduction below 1 SM NA. | MISSED APPROACH: Climb to 4000 direct MERLS and hold. |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|

|                              |                                        |                        |
|------------------------------|----------------------------------------|------------------------|
| FLP AWOS-3<br><b>132.075</b> | MEMPHIS CENTER<br><b>126.85 281.55</b> | CTAF<br><b>122.9 0</b> |
|------------------------------|----------------------------------------|------------------------|

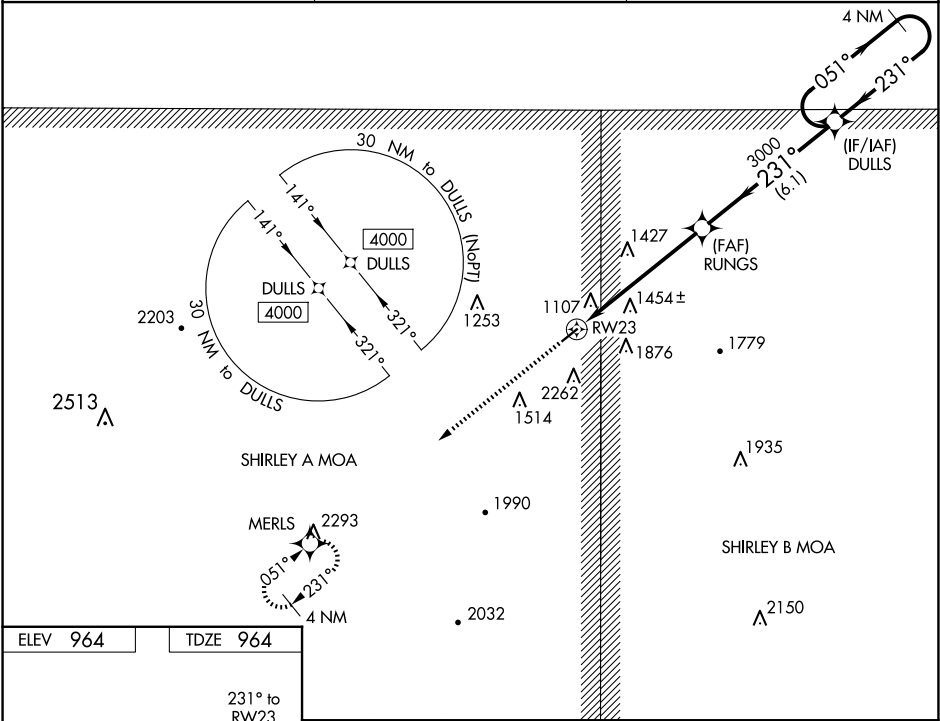

|              |                       |                         |                         |    |    |
|--------------|-----------------------|-------------------------|-------------------------|----|----|
| ELEV 964     | TDZE 964              |                         |                         |    |    |
|              |                       |                         |                         |    |    |
| 4000         | MERLS                 |                         |                         |    |    |
|              |                       |                         |                         |    |    |
| RINGS 3000   |                       |                         |                         |    |    |
| RW23         |                       |                         |                         |    |    |
| 5.8 NM       |                       | 6.1 NM                  |                         |    |    |
| CATEGORY     | A                     | B                       | C                       | D  |    |
| LPV DA       | 1512-1¾               |                         | 548 (600-1¾)            |    | NA |
| LNAV/VNAV DA | 1973-4                |                         | 1009 (1100-4)           |    | NA |
| LNAV MDA     | 1760-1<br>796 (800-1) | 1760-1¼<br>796 (800-1¼) | 1760-2½<br>796 (800-2½) | NA |    |
| CIRCLING     | 1760-1<br>796 (800-1) | 1760-1¼<br>796 (800-1¼) | 1760-2½<br>796 (800-2½) | NA |    |