

WAAS CH 42538 W31A	APP CRS 313°	Rwy Idg 5701 TDZE 2965 Apt Elev 2965
--	------------------------	---

RNAV (GPS) RWY 31


BOWMAN RGNL (BWW)

TA



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Heftinger altimeter setting and increase all DA 102 feet, and all MDA 120 feet; increase LPV and LNAV/VNAV visibility $\frac{1}{4}$ mile all Cats, increase LNAV Cat C visibility $\frac{1}{4}$ mile. Baro-VNAV and VDP NA when using Heftinger altimeter setting.

MISSED APPROACH:
Climb to 3500 then
climbing right turn to
6000 direct HAYNI
and hold.

AWOS-3PT 118.075	SALT LAKE CITY CENTER 126.85 305.2	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

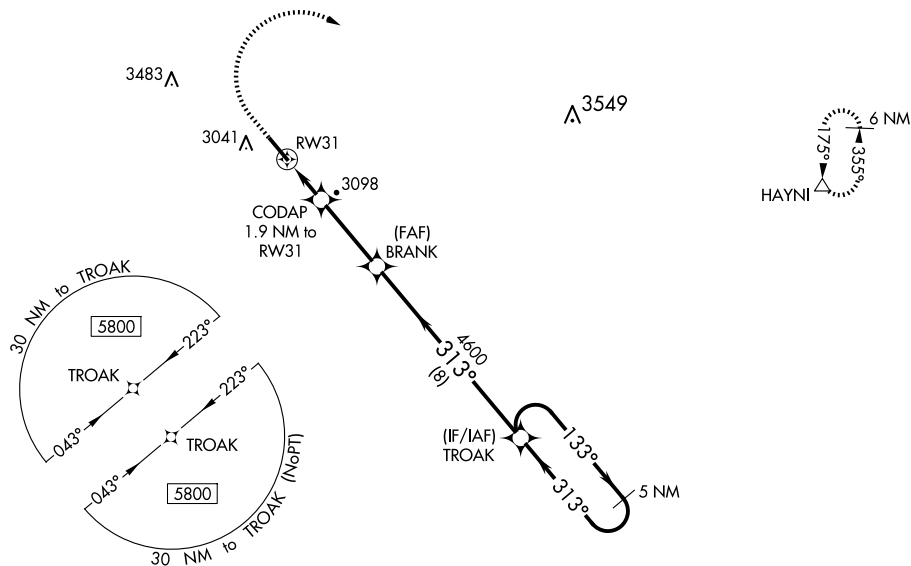

ELEV	2965		TDZE	2965
------	------	--	------	------

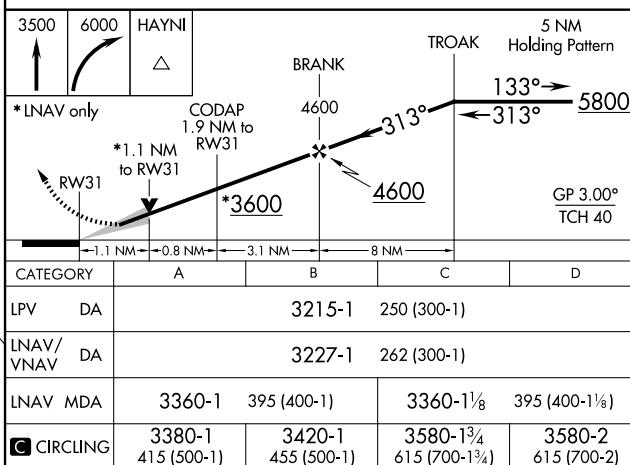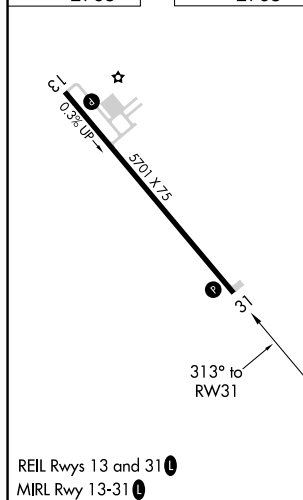

RNAV (GPS) RWY 31