

WAAS CH 93742 W35A	APP CRS 353°	Rwy Idg TDZE Apt Elev	5500 1409 1409
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 35
SIOUX COUNTY RGNL(SXX)

RNP APCH.

⚠ Baro-VNAV and VDP NA when using Le Mars altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received; use Le Mars altimeter setting: increase DA 59 feet and all MDA 60 feet, increase LNAV visibility Cat C/D to % SM. For inop ALS, increase LNAV/VNAV all Cats visibility to % SM, and LNAV Cat C/D visibility to % SM. For inop ALS when using Le Mars altimeter setting increase LNAV/VNAV all Cats visibility to % SM.

MALSR



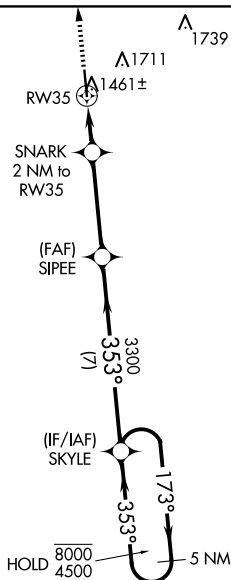

MISSED APPROACH: Climb to 4500 direct HALGA and hold.

AWOS-3P
120.075

SIOUX CITY APP CON ★
 124.6 307.0

UNICOM
122.7 (CTAF)

MISSED APCH FIX


1977^A

4500	HALGA
	

* LNAV only

SNARK

CATEGORY	A	B	C	D
LPV DA	1609-½ 200 (200-½)			
LNAV/ VNAV DA	1659-½ 250 (300-½)			
LNAV MDA	1720-½ 311 (400-½)			
C CIRCLING	1820-1 411 (500-1)	2080-1 671 (700-1)	2080-2 671 (700-2)	2080-2¼ 671 (700-2¼)



ELEV 1409

TDZE 1409

REIL Rwy 17

MIRL Rwy 17-