

WAAS CH 53340 W23A	APP CRS 227°	Rwy Idg 6370 TDZE 4892 Apt Elev 4892
--	------------------------	---

RNAV (GPS) RWY 23

HOT SPRINGS COUNTY (HSG)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA
A below -24°C (-11°F) or above 54°C (130°F). Circling NA
northwest of Rwy 5-23. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climbing left turn to 8400 direct RLY VOR/DME and hold.

AWOS-3PT 121.125	SALT LAKE CENTER 133.25 285.6	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

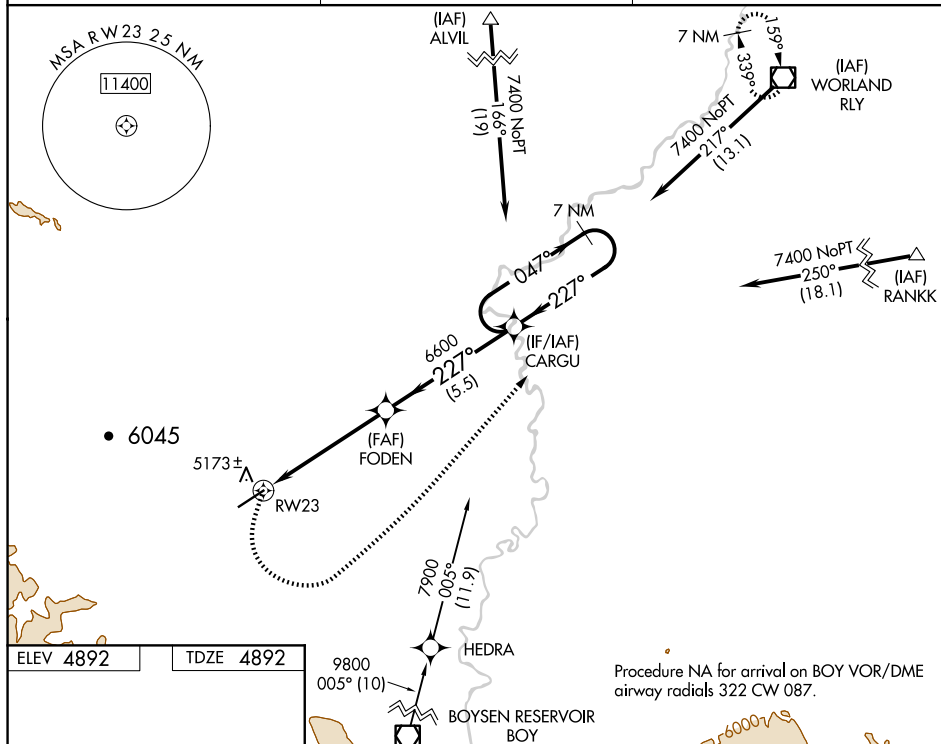


Diagram illustrating the 23R approach procedure. Key elements include:

- Initial Approach:** 0.3% LPV, 6370 x 75 ft width, 227° to RW23.
- Altitudes:** 8400, 6600, 5620-1.
- Distances:** 2.4 NM to RW23, 2.9 NM to FODEN, 5.5 NM to CARGO.
- Holding Pattern:** 7 NM Holding Pattern, 047° heading.
- GP 3.00° TCH 40.**

CATEGORY	A	B	C	D
LPV DA	5382-1 $\frac{3}{4}$	490 (500-1 $\frac{3}{4}$)		
LNAV/VNAV DA	5577-2 $\frac{1}{2}$	685 (700-2 $\frac{1}{2}$)		
LNAV MDA	5620-1	728 (800-1)	5620-2	728 (800-2)
C CIRCLING	5620-1	728 (800-1)	5620-2	5880-3
			728 (800-2)	988 (1000-3)