

WAAS CH 48917 W22A	APP CRS 225°	Rwy Idg 4098 TDZE 1424 Apt Elev 1425
--	------------------------	---


RNAV (GPS) RWY 22
ALEXANDRIA RGNL/CHANDLER FLD (AXN)

RNP APCH.


V Baro-VNAV NA when using Glenwood altimeter setting. For uncompensated
A Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 46°C.
When local altimeter setting not received, use Glenwood altimeter setting and
increase all DA 37 feet and all MDA 40 feet, increase LNAV/VNAV all Cats and
LNAV Cat D visibility ¼ mile. Rwy 22 helicopter visibility reduction below ¼ SM NA.

MISSED APPROACH: Climb to 3500 direct MOVSE and right turn on track 315° to EVDEQ and on track 024° to TILER and hold.

ASOS 118.375	MINNEAPOLIS CENTER 126.1 269.2	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

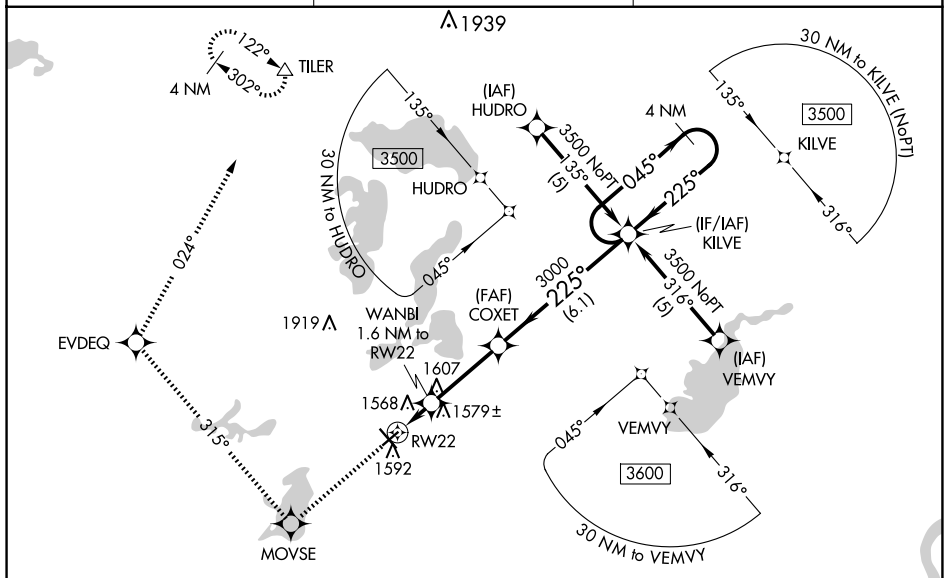

ELEV 1425		TDZE 1424
-----------	--	-----------



REIL Rwys 4, 13, and 22 **L**
MIRL Rwys 4-22 and 13-31 **L**

ALEXANDRIA, MINNESOTA
Orig-B 18JUL19

ALEXANDRIA RGNL/CHANDLER FLD (AXN)
RNAV (GPS) RWY 22

45°52'N-95°24'W

NC-1, 12 JUN 2025 to 10 JUL 2025