

ATLANTA, GEORGIA

AL-26 (FAA)

25051

WAAS CH 61299 W28A	APP CRS 275°	Rwy Idg 9000 TDZE 998 Apt Elev 1026
--	------------------------	--


RNAV (GPS) Y RWY 28

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). Simultaneous approach authorized with Rwy 26R or 26L or 27R, or Rwys 26R and 27R. DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.


ALSF-2

MISSED APPROACH:
Climb to 1500 then
climbing left turn to
3000 direct SCARR
and hold.


D-ATIS	ATLANTA APP CON	ATLANTA TOWER					ALL RWYS	GND CON			ALL RWYS	
ARR 119.65		8L-26R	8R-26L	9L-27R	9R-27L	10-28		(8L-26R,8R-26L)	(9L-27R,9R-27L)	10-28		
DEP 125.55	127.9	379.9	119.1	125.325	123.85	119.3	119.5	254.4	121.9	121.75	121.65	254.4

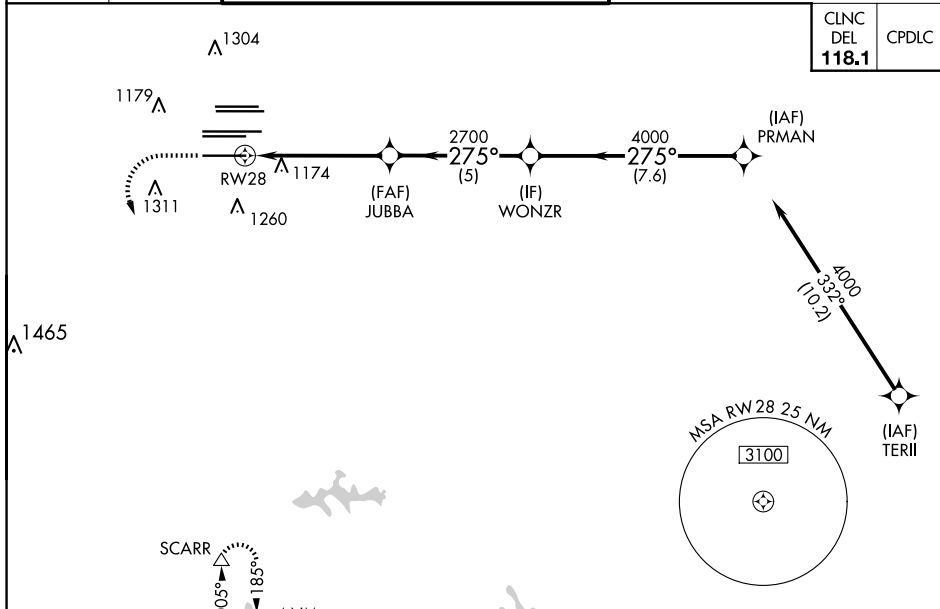

RADAR REQUIRED

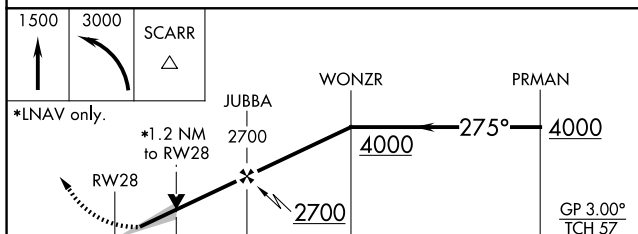

CATEGORY		A	B	C	D
LPV	DA	1198/18		200 (200-½)	
INAV/ VNAV	DA	1250/24		252 (300-½)	
INAV	MDA	1440/24	442 (500-½)	1440/45	442 (500-¾)

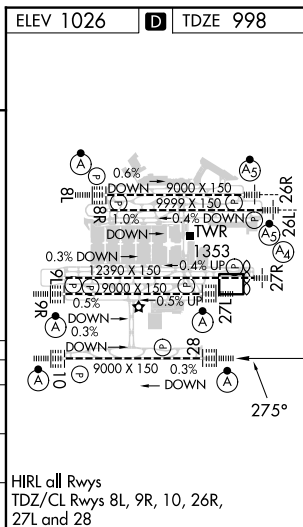

ATLANTA, GEORGIA
Amdt 4A 12OCT17

HARTSFIELD/JACKSON ATLANTA INTL (ATL)
33°38'N-84°26'W **RNAV (GPS) Y RWY 28**

SE-4, 12 JUN 2025 to 10 JUL 2025