

WAAS CH 58118 W30A	APP CRS 301°	Rwy ldg TDZE 493 Apt Elev 510
--	------------------------	---

RNAV (GPS) RWY 30R
MEADOWS FLD (BFL)


RNP APCH.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F). Circling NA northeast of Rwy 12L-30R. When local altimeter setting not received, use Porterville altimeter setting: increase LPV DA to 790, LNAV/VNAV DA to 990. Increase LNAV/VNAV all Cats visibilities to 1 ¼ mile; increase all MDA 100 feet and LNAV visibility Cats C and D to RVR 5000. VDP and Baro-VNAV NA when using Porterville altimeter setting. For inop ALS when using Porterville altimeter setting, increase LPV all Cats visibility to RVR 5000 and LNAV Cat C and D visibility to 1%. # RVR 2400 when using Porterville altimeter setting.


MALS R

MISSED APPROACH:
Climb to 1000 then climbing right turn to 3000 direct STEBN and hold.

ATIS 118.6	BAKERSFIELD APP CON ★ 118.8 284.625 118.9 270.3 (SOUTH) (NORTH)	BAKERSFIELD TOWER ★ 118.1 (CTAF) 0 257.8	GND CON 121.7	UNICOM 122.95
----------------------	--	--	-------------------------	-------------------------

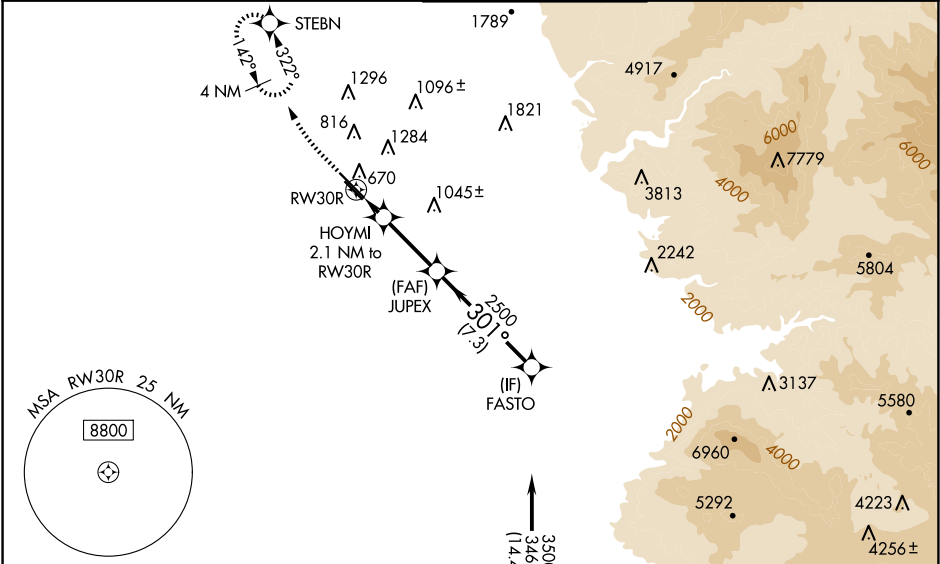

ELEV 510	D	TDZE 493
-----------------	----------	-----------------

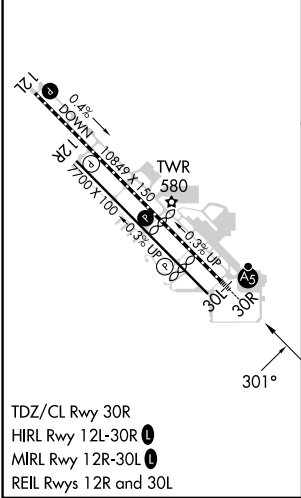

1000 3000 STEBN			
*LNAV only			
*1.1 NM to RWY 30R			
RWY 30R			
1.1 NM 1 NM 4.1 NM 7.3 NM			
CATEGORY	A	B	C
LPV DA#	698/18 205 (200-½)		
LNAV/VNAV DA	898/45 405 (400-¾)		
LNAV MDA	880/24	387 (400-½)	880/35 387 (400-¾)
CIRCLING	960-1	450 (500-1)	960-1½ 450 (500-1½) 1060-2 550 (600-2)

SW-3, 12 JUN 2025 to 10 JUL 2025

SW-3, 12 JUN 2025 to 10 JUL 2025