

APP CRS

319°

Rwy ldg

7822

TDZE

439

Apt Elev

459

RNAV (GPS) RWY 32L

SCOTT AFB/MIDAMERICA ST LOUIS (BLV)

RNP APCH-GPS.

ALSIF-1

ASR

For inop ALS, increase LNAV Cat C/D visibility to 1 3/8 mile.

MISSED APPROACH: Climb to 1500 then climbing left turn to 2400 direct QODCU and hold.

ATIS ★

128.7 256.7

ST LOUIS APP CON

125.2 281.5

SCOTT TOWER


128.25 253.5

GND CON

119.2 275.8

CLNC DEL

119.875 263.025

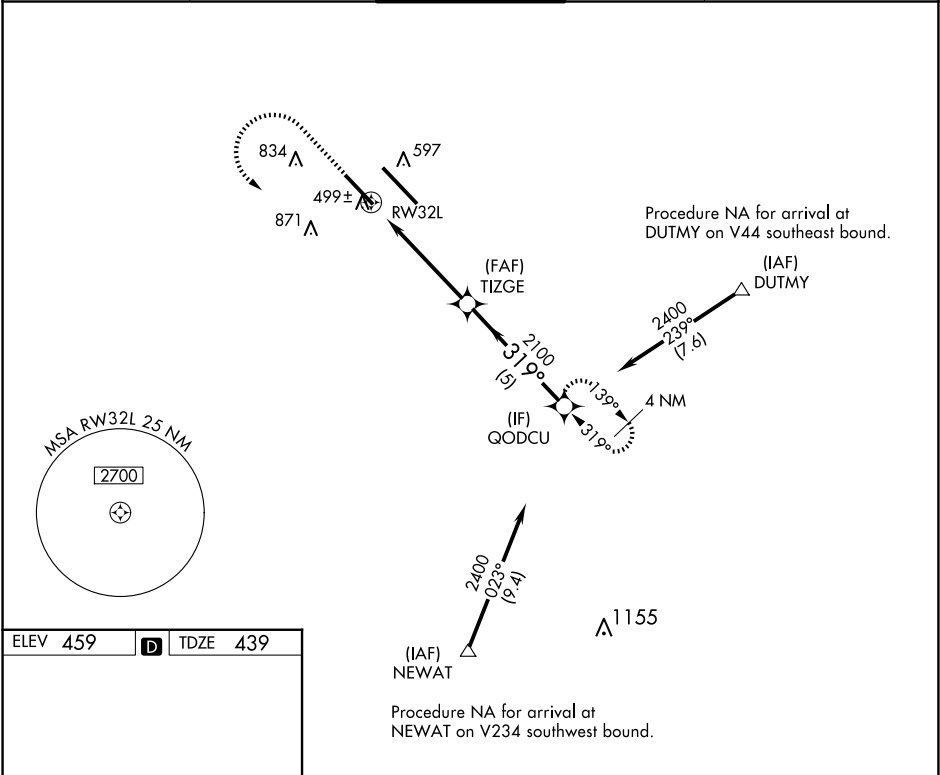

ELEV 459

D

TDZE 439

REIL Rwy 14L

HIRL Rwy 14R-32L and 14L-32R

1500

2400

QODCU

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 50).

QODCU

2400

319°

2100

1.4 NM to RW32L

3.03° TCH 55

1.4 NM

3.7 NM

5 NM

CATEGORY	A	B	C	D
LNAV MDA	920/24	481 (500-1/2)	920/50	481 (500-1)
CIRCLING	1000-1 541 (600-1)	1120-1 661 (700-1)	1240-2 1/4 781 (800-2 1/4)	1240-2 1/2 781 (800-2 1/2)